

08-11-00

A

08/10/00
J0902 U.S. PTO

J0941 U.S. PTO
09/636138
08/10/00

Patent Application Transmittal

(only for new nonprovisional applications under 37 C.F.R. 1.53(b))

Correspondence Address:
FROMMER LAWRENCE & HAUG LLP
745 FIFTH AVENUE
NEW YORK, NEW YORK 10151
TEL: (212) 588-0800
FAX: (212) 588-0500

Date: August 10, 2000

Attorney Docket No.: 450100-4983.1

ASSISTANT COMMISSIONER FOR PATENTS
Box Patent Application
Washington, D.C. 20231

Sir:

With reference to the filing in the United States Patent and Trademark Office of an application for patent, **which is a continuation-in-part of application Serial No. 09/352,241, filed July 13, 1999; Serial No. 09/366,872, filed August 4, 1999, and Serial No. 09/413,134, filed October 6, 1999** in the name(s) of:

Tetsujiro KONDO, Yoshinori WATANABE, Kenji TANAKA

entitled:

CODING APPARATUS AND METHOD, DECODING APPARATUS AND METHOD, DATA PROCESSING SYSTEM, STORAGE MEDIUM, AND SIGNAL

The following are enclosed:

- ☒ Specification (43 pages)
- ☒ 38 Sheet(s) of Drawings
- ☒ 20 Claim(s) (including 7 independent claim(s))
- ☐ This application contains a multiple dependent claim

- ☒ Our check for \$1002.00, calculated on the basis of the claims as amended by any enclosed preliminary amendment as follows:

| | |
|--|-----------|
| Basic Fee, \$690.00 (\$345.00) | \$ 690.00 |
| Number of Claims in excess of 20 at \$18.00 (\$9.00) | |
| Number of Independent Claims in excess of 3 at \$78.00 (\$39.00) each: 4 | 312.00 |
| Multiple Dependent Claim Fee at \$260.00 (\$130.00) | -0- |
| Total Filing Fee | \$1002.00 |
| Assignment Recording Fee \$40.00 | -0- |

- ☒ Oath or Declaration and Power of Attorney

☒ New ☐ signed ☒ unsigned
☐ Copy from a prior application (37 C.F.R. 1.63(d))


- ☐ Certified copy of each of the following application(s) to substantiate the claim(s) for priority made in the Declaration:

| <u>Application No.</u> | <u>Filed</u> | <u>In</u> |
|------------------------|--------------|-----------|
|------------------------|--------------|-----------|

Please charge any additional fees required for the filing of this application or credit any overpayment to Deposit Account No. 50-0320.

Respectfully submitted,

FROMMER LAWRENCE & HAUG LLP
Attorneys for Applicants

By: 
 William S. Frommer
 Reg. No. 25,506

Date of Deposit August 10, 2000

Charles Jackson
(Typed or printed name of person mailing paper or fee)

Charles Jackson
(Signature of person mailing paper or fee)

PATENT
450100-4983.1

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

JC841 U.S. PRO
09/636138
08/10/00

Applicants : Tetsujiro KONDO et al.

Filed : Herewith

For : CODING APPARATUS AND METHOD, DECODING APPARATUS
AND METHOD, DATA PROCESSING SYSTEM, STORAGE
MEDIUM, AND SIGNAL

745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

EXPRESS MAIL

Mailing Label Number EK406034754US

Date of Deposit August 10, 2000
I hereby certify that this paper or fee is being
deposited with the United States Postal Service
"Express Mail Post Office to Addressee" Service
under 37 CFR 1.10 on the date indicated above and
is addressed to the Assistant Commissioner for
Patents, Washington, D.C. 20231.

Charles Jackson
(Typed or printed name of person
mailing paper or fee)

Charles Jackson
(Signature of person mailing paper or fee)

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before the issuance of the first Official Action,
please amend the above-identified application as follows:

IN THE SPECIFICATION:

Please amend the specification as follows:

Page 1, before line 1: insert --This is a continuation-in-part of
application Serial No. 09/352,241, filed July 13, 1999; Serial
No. 09/366,872, filed August 4, 1999, and Serial No. 09/413,134,
filed October 6, 1999.

- 2 -

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE
APPLICATION FOR LETTERS PATENT

William S. Frommer
Registration No. 25,506
FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151
Tel. (212) 588-0800

CODING APPARATUS AND METHOD, DECODING APPARATUS AND METHOD, DATA PROCESSING SYSTEM, STORAGE MEDIUM, AND SIGNAL

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to a coding apparatus and method, a decoding apparatus and method, a data processing system, a storage medium, and a signal. In particular, the invention relates to a coding apparatus and method, a decoding apparatus and method, a data processing system, a storage medium, and a signal which allow information to be embedded into data without deterioration in decoded data and without increase in data amount.

2. Description of the Related Art

One of the techniques of embedding information without increasing the amount of data is to convert the least significant bit (LSB) or the lower two bits of, for example, digital audio data into information to be embedded. In this technique, the lower bits of digital audio data, which do not significantly influence the sound quality, are simply substituted for the information to be embedded. Accordingly, when the digital audio data is reproduced, it is output as it is without restoring the lower bits into the original state. More specifically, since it is difficult to restore the lower bits embedded with information into the original state, and also, since the lower bits do not significantly influence the sound quality, the digital audio data is output while containing information embedded therein.

According to the above-described technique, however, a signal different from the original signal is disadvantageously output, which affects the sound quality if the signal is audio data, or influences the image quality if the signal is video data.

SUMMARY OF THE INVENTION

In order to solve the above-described problems, according to one aspect of the present invention, there is provided a coding device for coding first information according to second information. The coding device includes a receiving unit for receiving the first information and the second information, and a coding unit for coding the first information according to the second information so that decoding is performed by utilizing an energy distribution possessed by the first information.

According to another aspect of the present invention, there is provided a coding method for coding first information according to second information. The coding method includes the steps of receiving the first information and the second information, and coding the first information according to the second information so that decoding is performed by utilizing an energy distribution possessed by the first information.

According to still another aspect of the present invention, there is provided a decoding device for decoding coded data obtained by coding first information according to second information. The

According to a further aspect of the present invention, there is provided an image processing method for performing processing for embedding information in an image. The image processing method includes a selection step of selecting a pixel of the image, and a processing step of performing processing on the pixel selected in the selection step according to the information so that the pixel is reproducible by

utilizing a correlation of the image, thereby embedding the information in the pixel.

According to a further aspect of the present invention, there is provided a storage medium for storing a computer program for enabling a computer to perform processing for embedding information in an image. The computer program includes a selection step of selecting a pixel of the image, and a processing step of performing processing on the pixel selected in the selection step according to the information so that the pixel is reproducible by utilizing a correlation of the image, thereby embedding the information in the pixel.

According to a further aspect of the present invention, there is provided a storage medium for storing an information-embedded image in which information is embedded, the information-embedded image being obtained by embedding the information in the image by selecting a pixel of the image, and by performing processing on the selected pixel according to the information so that the pixel is reproducible by utilizing a correlation of the image.

According to a further aspect of the present invention, there is provided an image processing apparatus for performing processing for decoding an information-embedded image into an original image and original information. The image processing apparatus includes: a selection unit for selecting a pixel of the image-embedded information; a processing unit for performing predetermined processing on the pixel selected by the selection unit; a correlation calculation unit for calculating a first correlation between the pixel selected by the selection unit and a peripheral pixel around the selected pixel, and for calculating a second correlation between the pixel selected by the selection unit and processed by the processing unit and the peripheral pixel around the pixel; a comparison unit for comparing the first correlation and the second correlation; and a decoding unit for decoding the pixel selected by the selection unit and the information embedded in the pixel based on a result obtained by the comparison unit.

According to a further aspect of the present invention, there is provided an image processing method for performing processing for decoding information-embedded image into an original image and original information. The image processing method includes: a selection step of selecting a pixel of the information-embedded image; a processing step of performing predetermined processing on the pixel selected in the selection step; a correlation calculation step of calculating a first correlation between the pixel selected in the selection step and a peripheral pixel around the selected pixel, and calculating a second correlation between the pixel selected in the selection step and processed in the processing step and the peripheral pixel around the pixel; a comparison step of comparing the first correlation and the second correlation; and a decoding step of decoding the pixel selected in the selection step and the information embedded in the pixel based on a result obtained in the comparison step.

According to a further aspect of the present invention, there is provided a storage medium for storing a computer program for enabling a computer to perform processing for decoding information-embedded image into an original image and original information. The computer program includes: a

selection step of selecting a pixel of the information-embedded image; a processing step of performing predetermined processing on the pixel selected in the selection step; a correlation calculation step of calculating a first correlation between the pixel selected in the selection step and a peripheral pixel around the selected pixel, and calculating a second correlation between the pixel selected in the selection step and processed in the processing step and the peripheral pixel around the pixel; a comparison step of comparing the first correlation and the second correlation; and a decoding step of decoding the pixel selected in the selection step and the information embedded in the pixel based on a result obtained in the comparison step.

According to a further aspect of the present invention, there is provided an image processing apparatus including a transmitter for transmitting an information-embedded image obtained by embedding information and a receiver for receiving the information-embedded image from the transmitter and for decoding the image. The transmitter includes: a first selection unit for selecting a pixel of the image; and a first processing unit for performing processing on the pixel selected by the first selection unit according to the information so that the pixel is reproducible by utilizing a correlation of the image, thereby embedding the information in the pixel and outputting the information-embedded image. The receiver includes: a second selection unit for selecting a pixel of the information-embedded image; a second processing unit for performing predetermined processing on the pixel selected by the second selection unit; a correlation calculation unit for calculating a first correlation between the pixel selected by the second selection unit and a peripheral pixel around the selected pixel, and for calculating a second correlation between the pixel selected by the second selection unit and processed by the second processing unit and the peripheral pixel around the pixel; a comparison unit for comparing the first correlation and the second correlation; and a decoding unit for decoding the pixel selected by the second selection unit and the information embedded in the pixel based on a result obtained by the comparison unit.

According to a further aspect of the present invention, there is provided an image processing method for use in an image processing apparatus including a transmitter for transmitting an information-embedded image obtained by embedding information and a receiver for receiving the information-embedded image from the transmitter and for decoding the image. The image processing method includes the steps of: selecting a pixel of the image by the transmitter; performing processing by the transmitter on the selected pixel according to the information so that the pixel is reproducible by utilizing a correlation of the image, thereby embedding the information in the pixel and outputting the information-embedded image; selecting the pixel of the information-embedded image by the receiver; performing predetermined processing by the receiver on the selected pixel; calculating by the receiver a first correlation between the pixel selected from the information-embedded image and a peripheral pixel around the selected pixel, and calculating a second correlation between the pixel selected from the information-embedded image and undergone the predetermined processing and the peripheral pixel

According to a further aspect of the present invention, there is provided a coding apparatus for coding first data according to second data. The coding apparatus includes a storing unit for storing at least partial data of the first data, and a coding unit for embedding data relating to the second data into the first data by rearranging, according to the second data, at least partial data of the first data stored in the storing unit.

According to a further aspect of the present invention, there is provided a decoding apparatus for decoding coded data obtained by coding first data according to second data. The decoding apparatus includes: a relation calculating unit for calculating a relation between first partial data and second partial data of the coded data; and a decoding unit for decoding the coded data into the original first data by moving the first partial data and the second partial data of the coded data based on the relation calculated by the relation calculating unit and for decoding the second data that is embedded in the coded data according to the movement.

According to a further aspect of the present invention, there is provided a data processing system for coding first data into coded data according to second data, and for decoding the coded data. The data processing system includes: a storing unit for storing at least partial data of the first data; a coding means for embedding data relating to the second data into the first data by rearranging, according to the second data, at least partial data of the first data stored in the storing unit; a relation calculating unit for calculating a relation between first partial data and second partial data of the coded data; and a decoding unit for decoding the coded data into the original first data by moving the first partial data and the second partial data of the coded data based on the relation calculated by the relation calculating unit, and for decoding the second data that is embedded in the coded data according to the movement.

According to a further aspect of the present invention, there is provided a storage medium for storing a program, which is controllable by a computer, for coding first data according to second data. The program includes: a storing step of storing at least partial data of the first data; and a coding step of embedding data relating to the second data into the first data by rearranging at least partial data of the first data stored in the storing step according to the second data.

According to a further aspect of the present invention, there is provided a storage medium storing a program, which is controllable by a computer, for decoding coded data obtained by coding first data according to second data. The program includes: a relation calculating step of calculating a relation between first partial data and second partial data of the coded data; and a decoding step of decoding the coded data into the original first data by moving the first partial data and the second partial data of the coded data based on the relation calculated in the relation calculating step, and for decoding the second data that is embedded in the coded data according to the movement.

According to a further aspect of the present invention, there is provided a signal having a program, which is controllable by a computer, for coding first data according to second data. The program includes: a storing step of storing at least partial data of the first data; and a coding step of embedding data relating to the second data into the first data by rearranging at least partial data of the first data stored in the storing step according to the second data.

According to a further aspect of the present invention, there is provided a signal having a program, which is controllable by a computer, for decoding coded data obtained by coding first data according to second data. The program includes: a relation calculating step of calculating a relation between first partial data and second partial data of the coded data; and a decoding step of decoding the coded data into the original first data by moving the first partial data and the second partial data of the coded data based on the relation calculated in the relation calculating step, and for decoding the second data that is embedded in the coded data according to the movement.

According to a further aspect of the present invention, there is provided a signal having first data that is coded according to second data by using a program which is controllable by a computer. The program includes: a storing step of storing at least partial data of the first data; and a coding step of embedding data relating to the second data into the first data by rearranging at least partial data of the first data stored in the storing step according to the second data.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram illustrating an embodiment of an image transmitting system incorporating the present invention;

Fig. 2 illustrates an image to be coded;

Fig. 3A is a schematic diagram illustrating an image before it is coded or after it is coded by utilizing the correlation according to an embodiment of the present invention;

Fig. 4 is a block diagram illustrating an example of the configuration of an embedding coder 3 shown in Fig. 1;

Fig. 6 illustrates the processing in step S1 of Fig. 5;

Fig. 8 illustrates the processing performed by a CPU 43 shown in Fig. 7;

Fig. 10 illustrates the processing for embedding one-bit information in four pixels;

Fig. 11B is a schematic diagram illustrating an image after it is coded by utilizing the continuity according to an embodiment of the present invention;

Fig. 13A illustrates original image data before the embedded coding processing shown in Fig. 12 is performed or after a decoding operation is performed;

Fig. 13C is a diagram illustrating the pixel value of the 801st line of the original image data shown in Fig. 13A;

Fig. 13E is a diagram illustrating the pixel value of the 801st line of the image data after additional information is embedded according to the embedded coding processing shown in Fig. 12;

Fig. 15A illustrates an image before it is coded or after it is decoded by utilizing the similarity according to an embodiment of the present invention;

Fig. 16A illustrates an image before it is coded or after it is decoded by utilizing the similarity according to an embodiment of the present invention;

Fig. 16B illustrates an image after it is coded by utilizing the similarity according to an

Fig. 17 is a flowchart illustrating the embedded coding processing for coding an image by utilizing the similarity according to an embodiment of the present invention;

Fig. 18B illustrates coded image data after the embedded coding processing shown in Fig. 17 is performed;

Fig. 20 is a block diagram illustrating an example of the hardware configuration of the embedding coder 3 shown in Fig. 1;

Fig. 22 is a flowchart illustrating the operation performed by the embedding coder 3 shown in Fig. 21;

Fig. 23B illustrates the swapping of pixels in step S3 of Fig. 22;

Fig. 24 is a block diagram illustrating an example of the hardware configuration of a decoder 6 shown in Fig. 1;

Fig. 26 is a flowchart illustrating the operation performed by the decoder 6 shown in Fig. 25;

Fig. 28 is a photograph of an image after the embedded coding processing shown in Fig. 22 is simulated;

Fig. 30A illustrates column vectors to be swapped according to the flowchart of Fig. 22;

Fig. 31 is a diagram illustrating a column vector space;

Fig. 33 illustrates image data before being swapped in the column and row directions;

Fig. 34A illustrates the swapping operation in the column direction;

Fig. 34B illustrates the swapping operation in the row direction;

Fig. 35 illustrates a diagram illustrating pixels used as decoding references;

Fig. 36 is another diagram illustrating pixels used as decoding references;

Fig. 37 is still another diagram illustrating pixels used as decoding references;

Fig. 38A illustrates a computer in which a program executing the processing of the present invention is to be installed;

Fig. 38B illustrates examples of storage media in which a program executing the processing of the present invention is to be stored;

Fig. 38C schematically illustrates a program executing the processing of the present invention being distributed to a computer via a satellite or a network; and

Fig. 39 is a block diagram illustrating an example of a computer in which a program executing the processing of the present invention is to be installed.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

A coding apparatus and method, a decoding apparatus and method, a digital processing system, a storage medium, and a signal according to the present invention will be hereinafter described with reference to the accompanying drawings.

Fig. 1 is a schematic diagram illustrating an image transmission system incorporating the present invention. In this specification, a "system" may be a unit logically formed of a plurality of apparatuses, and it is not necessary that the apparatuses be contained in the same housing.

Referring to Fig. 1, the image transmission system is formed of a coding unit 10 and a decoding unit 20. The coding unit 10 codes an object, for example, an image, and outputs the coded data. The decoding unit 20 reproduces coded data into the original image.

More specifically, an image database 1 stores images to be coded, for example, digital images, and an image is read from the image database 1 and is supplied to an embedding coder 3. An additional-information database 2 stores additional information, for example, digital data as information to be embedded in the image to be coded. The additional information is read from the additional-information database 2 and is supplied to the embedding coder 3.

Upon receiving the image from the image database 1 and the additional information from the additional-information database 2, the embedding coder 3 codes the image in accordance with the additional information supplied from the additional-information database 2 so that the coded image can be decoded by utilizing the energy distribution of the image supplied from the image database 1. The embedding coder 3 codes the image by embedding the additional information in the image so that the coded image can be decoded by utilizing the energy distribution of the image, and outputs the coded data. The coded data may then be recorded in a recording medium 4, such as a semiconductor memory, a magneto-optical disk, a magnetic disk, an optical disc, a magnetic tape, or a PD disk. Alternatively, the

An image 101 formed of H lines, such as that shown in Fig. 2, is taken as an example. Concerning the correlation between the first line 103 and another line, as illustrated in Fig. 3A, the correlation of the first line 103 to a line located closer to the first line 103, i.e., an upper line of the image 101 shown in Fig. 2, is greater, as indicated by the correlation value 201 between the first line 103 and the M-th line 104. Conversely, the correlation of the first line 103 to a line positioned farther from the first line 103, i.e., a lower line of the image 101 shown in Fig. 2, is smaller, as indicated by the correlation value 202 between the first line 103 and the N-th line 105. In other words, the image 101 shown in Fig. 2 has a deviation of correlation in which a line closer to the first line 103 has a greater level of correlation,

and a line farther from the first line 103 has a smaller level of correlation.

In the image 101 shown in Fig. 2, the pixel values of the M-th line 104 relatively close to the first line 103 and the pixel values of the N-th line 105 relatively far from the first line 103 are swapped, and after calculating the correlation between the first line and each of the M-th line and the N-th line, the resultant image may be indicated, as shown in Fig. 3B. That is, in the image 101 in which the M-th line 104 and the N-th line 105 have been swapped, the correlation of the first line 103 to the M-th line 104 closer to the first line 103 becomes smaller, as represented by the correlation value 203 with the M-th line 104, while the correlation of the first line 103 to the N-th line 105 farther from the first line 103 becomes greater, as represented by the correlation value 204 with the N-th line 105.

Thus, the original deviation of correlation is destroyed in the correlation shown in Fig. 3B. Generally, however, concerning images, the destroyed deviation of correlation can be restored to the original state by utilizing the original deviation of correlation. That is, the deviation of correlation shown in Fig. 3B is unnatural in terms of the original deviation of correlation possessed by the image 101, and by swapping the M-th line 104 and the N-th line 105, the original deviation of correlation can be obtained. Thus, the unnatural deviation of correlation can be restored to the correct deviation of correlation shown in Fig 3A, so that the original image 101 can be decoded.

According to the example shown in Figs. 2, 3A, and 3B, the image 101 is coded by exchanging the lines. In this case, the embedding coder 3 determines which lines should be moved and swapped according to the additional information. Meanwhile, the decoder 6 returns the swapped lines to the original positions by utilizing the correlation, i.e., replaces the coded image by the original image, thereby restoring the original image 101. During the decoding operation, the decoder 6 detects which lines have been moved and swapped so as to decode the additional information embedded in the image 101.

Fig. 4 illustrates an example of the configuration of the embedding coder 3 shown in Fig. 1 that performs embedded-coding by embedding additional information in an image so that the coded image can be decoded into the original image by utilizing the correlation of the image.

Images output from the image database 1 are supplied to a frame memory 31 in which the images are temporarily stored in units of frames. A central processing unit (CPU) 32 performs embedded-coding processing, which will be described below, by executing a program stored in a program memory 33. That is, the CPU 32 receives each bit of additional information from the additional-information database 2 and embeds the one-bit additional information in the image stored in the frame memory 31. More specifically, the CPU 32 selects part of the pixels forming the image stored in the frame memory 31 and performs predetermined processing on the selected pixels according to the additional information so that the original image can be reproduced by utilizing the correlation of the image. As a result, the additional information can be embedded in the selected pixels.

The program memory 33 is formed of, for example, a read only memory (ROM) or a random access memory (RAM), and stores a computer program for enabling the CPU 32 to execute the

embedded-coding processing. An output interface (I/F) 34 reads an image having embedded additional information therein from the frame memory 31 and outputs it as coded data.

The frame memory 31 is formed of a plurality of banks so that a plurality of frames can be stored. By switching the banks, the frame memory 31 simultaneously stores the image supplied from the image database 1 and the pixels of the image to be processed by the CPU 32. Concurrently, the frame memory 31 also outputs the image having the embedded information therein (coded data). With this arrangement, the coded data can be output in real time even if the image supplied from the image database 1 is a moving picture.

The embedded-coding processing performed by the embedding coder 3 is described below with reference to the flow chart of Fig. 5.

Images are read from the image database 1 and are supplied to the frame memory 31 and stored therein in units of frames. Meanwhile, the CPU 32 receives each bit of additional information from the additional-information database 2. In step S1, upon receiving one-bit additional information, the CPU 32 selects from the frame memory 31 the pixels in which the added information is to be embedded (pixels to be processed).

In this embodiment, pixels are alternately selected from the image stored in the frame memory 31 according to a checkerboard pattern, as shown in Fig. 6. That is, every time the processing of step S1 is executed, the CPU 32 sequentially selects a pixel without a hatched portion in Fig. 6, one-by-one, as a pixel to be processed according to, for example, line scanning. In Fig. 10, $p(x, y)$ indicates the pixel positioned at the x -th column from the left and the y -th row from the top (the same applies to the pixels shown in Fig. 10).

Subsequently, in step S2, the CPU 32 determines whether the additional information received from the additional-information database 2 is 1 or 0. If it is found in step S2 that the additional information is 0, the process returns to step S1. That is, if the additional information is 0, the CPU 32 does not perform any processing on the selected pixel (adds 0 as a predetermined constant), and returns to step S1. In step S1, the CPU 32 waits for subsequent one-bit additional information supplied from the additional-information database 2 and selects a pixel to be processed. Thereafter, processing similar to that discussed above is repeated.

If it is determined in step S2 that the additional information is 1, the process proceeds to step S3. In step S3, the CPU 32 performs predetermined processing on the selected pixel, more specifically, the CPU 32 adds a predetermined constant to the value of the selected pixel, such as two to the power of the value obtained by subtracting one from the number of bits assigned to the pixel. For example, if eight bits are assigned to the pixel of the image, 2^7 is added to the value of the pixel to be processed in step S3.

If the pixel value is represented by a luminance component Y , and color components U and V , the above-described addition may be made on any one of the components Y , U , and V . If the pixel value

is indicated by components R, G, and B, the above-described addition may be performed on any one of the components R, G, and B.

In step S4, it is determined whether the value obtained in step S3 causes an overflow. If the outcome of step S4 is no, the process proceeds to step S6 in which the CPU 32 writes (overwrites) the added value into the frame memory 31 as the value of the pixel to be processed. The process then returns to step S1.

If it is found in step S4 that the added value causes an overflow, i.e., that the value is 2^8 or greater, the process proceeds to step S5 in which the added value is corrected. That is, in step S5, the overflowed value is corrected, for example, by an amount equal to the value overflowed (to the value obtained by subtracting 2^8 from the overflowed added value). The process then proceeds to step S6 in which the CPU 32 writes the corrected value into the frame memory 31 as the value of the pixel to be processed, and waits for a subsequent one-bit additional information supplied from the additional-information database 2.

After the image for one frame stored in the frame memory 31 has been processed, the output I/F 34 reads the one-frame image (having the additional information embedded therein) as coded data, and the CPU 32 continues to execute processing on a subsequent one-frame image stored in the frame memory 31.

As described above, part of the pixels forming the image stored in the frame memory 31 is selected, and the processing corresponding to the additional information is performed on the selected pixels so that the original image can be decoded by utilizing the correlation of the image, thereby embedding the additional information in the selected pixels. With this arrangement, the additional information can be embedded in the image with minimal loss of the image quality without increasing the amount of data.

That is, the pixels having the embedded additional information therein can be decoded (restored) into the original pixels and into the additional information without requiring the overhead by utilizing the correlation of the image, i.e., the correlation between the pixels with the additional information and the pixels without the additional information. Accordingly, the resulting decoded image (reproduced image) is basically free from the degradation of the image quality caused by embedding the additional information.

Fig. 7 illustrates an example of the configuration of the decoder 6 shown in Fig. 1 that decodes the coded data output from the embedding coder 3 shown in Fig. 4 into the original image and into the additional information by utilizing the correlation of the image.

The coded data, i.e., the image having the embedded additional information (hereinafter sometimes referred to as an "embed image"), is supplied to a frame memory 41. The frame memory 41 temporarily stores therein the embedded images in units of frames. The frame memory 41 is constructed similarly to the frame memory 31 shown in Fig. 4, and by changing the banks, the embed images can be

processed in real time even if the images are moving pictures. An output interface (I/F) 42 reads an image (decoded image) obtained by performing embed-decoding processing by a CPU 43, which will be discussed later, and outputs the decoded image.

The CPU 43 performs decoding processing by executing a program stored in a program memory 44. That is, the CPU 43 decodes the embed image stored in the frame memory 41 into the original image and into the additional information by utilizing the correlation of the image. More specifically, the CPU 43 selects part of the pixels forming the embed image as pixels to be processed, and performs processing opposite to the processing executed by the CPU 32 shown in Fig. 4, as illustrated in Fig. 8, on the selected pixel, thereby changing the pixel value. The CPU 32 then calculates a correlation value R1 (first correlation) between the pixel to be processed before the pixel value is changed and the peripheral pixels (which are horizontally adjacent to the pixel to be processed in the embodiment shown in Fig. 8), and also calculates a correlation value R2 (second correlation) between the pixel to be processed after the pixel value has been changed and the peripheral pixels. Then, the CPU 32 compares the correlation value R1 with the correlation value R2. Based on the comparison result, the CPU 43 selects one of the pixel values before being changed and after being changed and determines the selected value as the decoded value, and also decodes the additional information embedded in the decoded image (1 or 0).

The program memory 44 is constructed similarly to the program memory 33 shown in Fig. 4 and stores therein a computer program for enabling the CPU 43 to perform decoding processing.

The decoding processing performed by the decoder 6 is discussed below with reference to the flow chart of Fig. 9.

Embed images are sequentially stored in units of frames in the frame memory 41. In step S11, the CPU 43 selects the pixel to be decoded (pixel to be processed) from an embed image stored in the frame memory 41.

As in the case of the CPU 32 shown in Fig. 4, the CPU 43 alternately selects pixels from the embed image stored in the frame memory 41 according to a checkerboard pattern, as illustrated in Fig. 6. That is, every time the processing of step S11 is executed, the CPU 43 sequentially selects a pixel without a hatched portion in Fig. 6, one-by-one, as a pixel to be processed, according to, for example, line scanning.

In step S12, the CPU 43 executes processing, on the pixel opposite to the processing performed by the CPU 32 shown in Fig. 4. That is, the CPU 43 subtracts a predetermined constant from the pixel value, i.e., two to the power of the value obtained by subtracting one from the number of bits assigned to the pixel of the image. For example, if eight bits are assigned to the pixel value, as stated above, 2^7 is subtracted from the value of the pixel to be processed in step S12.

If the pixel value is represented by a luminance component Y, and color components U and V, the above-described subtraction may be made on any one of the components Y, U, and V. If the pixel

After subtracting 2^7 from the pixel value in step S12, the process proceeds to step S13 in which it is determined whether the subtracted value causes an underflow. If the outcome of step S13 is no, the process skips step S14 and proceeds to step S15.

In step S15, the CPU 43 calculates a correlation value R1 between the pixel value P1 (the value from which 2^7 is not subtracted in step S12, hereinafter sometimes referred to as the "first pixel value") and peripheral pixels, for example, pixels horizontally adjacent to the pixel P1. The CPU 43 also calculates a correlation value R2 between the subtracted pixel value P2 (which has been corrected in step S14, hereinafter sometimes referred to as the "second pixel value") and peripheral pixels, for example, pixels horizontally adjacent to the pixel P2.

In step S15, the pixels used for obtaining the correlation values R1 and R2 are not restricted to the pixels horizontally adjacent to the pixel P1 or P2, and may be pixels vertically adjacent to the pixel P1 or P2 or may be pixels temporally adjacent to the pixel P1 or P2. It is not necessary that the pixels for obtaining the correlation values R1 and R2 be spatially or temporally adjacent. Yet, it is desirable that the pixels indicated by hatched portions in Fig. 6, i.e., the pixels without embedded additional information, be used for determining the correlation values R1 and R2 with respect to the pixels P1 and P2, respectively. The reason for this is as follows. Even if the correlation value between the pixel P1 or P2 and the pixels having embedded information therein is obtained, the correlation of the pixel P1 or P2 to the original image cannot be acquired, which makes it impossible to utilize the principle of the correlation of the image. It is thus difficult to correctly decode the original pixel values and the additional information from the pixels having the embedded additional information therein. Additionally, since the

pixel P1 or P2 is decoded by utilizing the correlation of the image, it is preferable that the pixels used for obtaining the correlation values R1 and R2 be positioned spatially or temporally adjacent to the pixel P1 or P2.

Then, after calculating the correlation values R1 and R2, the process proceeds to step S16 in which the CPU 43 compares the correlation values R1 and R2.

If it is determined in step S16 that the correlation value R1 is greater than the correlation value R2, the process proceeds to step S17. In step S17, the CPU 43 outputs 0 as the decoded additional information, and returns to step S11. In this case, the value stored in the frame memory 41 is not overwritten, and thus, the decoded pixel value remains the same as the pixel value P1.

More specifically, it has been determined in step S16 that the correlation value R1 concerning the first pixel value P1 is greater than the correlation value R2 concerning the second pixel value P2. It is thus demonstrated that the pixel to be decoded may be more precisely represented by the pixel value P1 than the pixel value P2, and the pixel value P1 is then determined to be the decoded pixel value. Since 2^7 is not subtracted from the pixel value P1 in step S12, it can be considered that 2^7 has not been added in step S3 of Fig. 5. In the embed-coding processing shown in Fig. 5, it is determined that 2^7 is not added when the additional information indicates 0. Thus, if the correlation value R1 concerning the first pixel value P1 is greater than the correlation value R2 concerning the second pixel value P2, and if it is likely that the pixel value P1 rather than the pixel value P2 is determined to be the pixel value to be decoded, the additional information embedded in the corresponding pixel is 0.

If it is determined in step S16 that the correlation value R2 is equal to or greater than the correlation value R1, the process proceeds to step S18. In step S18, the CPU 43 overwrites the pixel value stored in the frame memory 41 by the value obtained by subtracting 2^7 from the pixel value, i.e., by the second pixel value P2. In this case, therefore, the pixel value P2 is determined to be the decoded pixel value. The process then proceeds to step S19 in which the CPU 43 outputs 1 as the decoded additional information. The process then returns to step S11.

More specifically, it has been determined in step S16 that the correlation value R2 concerning the second pixel value P2 is equal to or greater than the correlation value R1 concerning the first pixel value P1. It is thus revealed that the pixel to be decoded can be represented more precisely by the pixel value P2 than the pixel value P1. Accordingly, the pixel value P2 is determined to be the decoded pixel value. Since 2^7 is subtracted from the pixel value P2 in step S12, it can be considered that 2^7 has been added in step S3 of Fig. 5. In the embedded-coding processing shown in Fig. 5, it is determined that 2^7 is added when the additional information indicates 1. Thus, if the correlation value R2 concerning the second pixel value P2 is equal to or greater than the correlation value R1 concerning the first pixel value P1, and if it is likely that the pixel value P2 is determined to be the pixel value to be decoded, the additional information embedded in the corresponding pixel is 1.

If the difference between the correlation values R1 and R2 obtained as described above is small,

In the foregoing embodiment, the additional information is embedded by adding 0 or 2^7 to the pixel value (in other words, by adding 2^7 or not adding 2^7). The value to be added to the pixel value is not limited to 2^7 . If, however, a value which may produce an influence on only the lower bits of the pixel value is added, the resulting added pixel value does not become substantially different from the original pixel value. Accordingly, no substantial difference be observed between the correlation values R1 and R2 obtained in step S15 of Fig. 9. This decreases the precision of the decoded pixel and the decoded additional information. It is therefore desirable that the value to be added to the pixel value

According to the foregoing embodiment, the additional information is embedded by adding a predetermined value to the pixel value. However, the additional information may be embedded by performing an operation on the pixel value other than the addition (for example, bit inversion). As discussed above, however, with a view to maintaining the quality of the decoded pixel value and the decoded additional information, the operation should be determined so that a significant difference can be produced between the correlation value concerning the original pixel value and the correlation value concerning the pixel value obtained after performing the corresponding operation.

More specifically, it is now assumed that one-bit additional information is embedded in the four pixels $p(1, 4)$, $p(5, 4)$, $p(1, 8)$, and $p(5, 8)$, as illustrated in Fig. 10. In the coding operation, the same operation is conducted on each of the pixels $p(1, 4)$, $p(5, 4)$, $p(1, 8)$, and $p(5, 8)$ according to the additional information, thereby embedding the one-bit additional information in the four pixels. In the decoding operation, the aforementioned correlation value $R1$ concerning the first pixel value $P1$ and the correlation value $R2$ concerning the second pixel value $P2$ are calculated with respect to each of the pixels $p(1, 4)$, $p(5, 4)$, $p(1, 8)$, and $p(5, 8)$. Then, the correlation value $R1$ and the correlation value $R2$ are compared. Upon comparison, the greater pixel values are determined to be the decoded pixel values $p(1, 4)$, $p(5, 4)$, $p(1, 8)$, and $p(5, 8)$ and the decoded additional information. Alternatively, the sum of the correlation values $R1$ concerning the first pixel values $P1$ and the sum of the correlation values $R2$ concerning the second pixel values $P2$ with respect to all the pixel values $p(1, 4)$, $p(5, 4)$, $p(1, 8)$, and $p(5, 8)$ may be obtained, and upon comparing the two sums, the greater sum may be determined to be the decoded pixel values $p(1, 4)$, $p(5, 4)$, $p(1, 8)$, $p(5, 8)$ and the decoded additional information.

As for the continuity of information, it is now assumed that for a certain line of an image, a waveform 301 as shown in Fig. 11A is observed in which the variation pattern of pixel values is continuous. In another line that is distant from the above line, a variation pattern of pixel values is observed which is different in continuity from the variation pattern of the above line; a continuity also exists. That is, when focussing attention on a certain pixel value variation pattern, the following

deviation of continuity is found in which a similar pixel value variation pattern is observed in adjacent lines and the pixel value variation patterns become more different as lines are positioned farther away from each other.

For example, part of the waveform 301 shown in Fig. 4A in which the variation pattern of pixel values is continuous is substituted by a waveform 302 that is distant from the waveform 301 and has a different variation pattern of pixel values as shown in Fig. 4B.

In Fig. 4B, the above-described deviation of continuity is destroyed. However, the destroyed deviation of continuity can be restored by utilizing the deviation of continuity that portions adjacent to each other have continuous pixel value variation patterns and pixel value variation patterns become more different when pixels are more distant from each other. More specifically, in Fig. 4B, the pixel value variation pattern 302 of the part of the waveform is clearly different from the pixel value variation patterns of the other parts, and hence the deviation of continuity of the original image can be restored by replacing the pixel value variation pattern 302 with a waveform having a pixel value variation pattern similar to the pixel value variation patterns of the other parts. The waveform shown in Fig. 11A, that is, the original waveform, can be restored from the waveform shown in Fig. 11B by performing such replacement.

In the example described above with reference to Figs. 11A and 11B, the image coding is to replace part of the waveform with a pixel value variation pattern that is much different from adjacent pixel value variation patterns. In the coding, the embedding encoder 3 determines based on additional information, for example, what part of the waveform should be changed greatly in pixel value variation pattern and to what extent the pixel value variation pattern should be changed. The decoder 6 restores the original waveform from a coded signal, that is, a waveform having a part with a much different pixel value variation pattern by utilizing the deviation of continuity in which the pixel value variation patterns of adjacent pixels are continuous and pixel value variation patterns become more different when the pixels are more distant from each other. Further, in the decoding, the decoder 6 also restores embedded additional information by detecting, for example, what part of the waveform was changed greatly in pixel value variation pattern and to what extent the pixel value variation pattern was changed.

Another embodiment of the present invention is now described in detail with reference to the drawings. In this embodiment, additional information is embedded into an image so that the embedded additional information can be decoded by utilizing the continuity of the image.

The configuration of an embedding coder used in this embodiment is similar to that of the embedding coder 3, and an explanation thereof will thus be omitted.

The embedded coding operation performed by the embedding coder 3 is discussed below with reference to the flow chart of Fig. 12.

In step S21, the CPU 32 controls data of an image for one frame to be transferred from the image database 1 to the frame memory 31 and also detects a continuous area of the image data and stores

the position of the continuous area in the program memory 33 as the continuous area data.

More specifically, the CPU 32 detects a continuous area of image data consisting of $224 (= 7 \times 32) \times 1600$ pixels as shown in Fig. 13A. The image data is divided into image blocks, as shown in Fig. 13A, for example, each block consisting of 32×1 pixels, and discrete cosine transform (DCT) processing is performed on each image block so as to calculate a DCT coefficient of each image block.

The CPU 32 scans given image blocks in the order of raster scanning, and sequentially calculates a difference between the DCT coefficient of the corresponding given image block and the DCT coefficient of an image block which is positioned adjacent to the given image block on the left side, and then stores the calculated differences in the program memory 33 as the continuity evaluation values of the given image blocks. Subsequently, the CPU 32 determines that image blocks whose continuity evaluation values (differences) are not greater than a predetermined threshold are continuous areas, and stores the positions of such continuous areas in the program memory 33. In this case, some image blocks within the calculated continuous area may be determined to be a non-continuous area because of an influence of, for example, noise. Thus, after detecting the continuous area, the CPU 32 performs corrections by substituting some non-continuous image blocks with image blocks of the continuous area by enlarging or reducing the continuous area.

In step S22, the CPU 32 receives additional information from the additional-information database 2 in units of 6 bits (3 bits + 3 bits).

Then, in step S23, the CPU 32 selects and extracts the first line and the 801st line shown in Fig. 13A into which the above-described 6-bit additional information is to be embedded. Simultaneously, by referring to the continuous area data stored in the program memory 33 in step S21, the CPU 32 selects and extracts only the continuous areas from the first line and the 801st line. In this embodiment, the first line and the 801st line are wholly selected, assuming that the whole areas of the first line and the 801st line are continuous areas.

In step S24, the CPU 32 embeds the additional information into the image data by swapping the image of the first line with the image of the 801st line. An embedding method is stated below with reference to Figs. 13B, 13C, 13D, and 13E.

Fig. 13B illustrates pixel values of the image data of the first line before the additional information is embedded. Fig. 13C illustrates pixel values of the image data of the 801st line before the additional information is embedded. Figs. 13B and 13C show that the variation pattern (frequency characteristics) of the pixel values are different between the image data of the first line and that of the 801st line.

In this embodiment, it is assumed that a total of 6 bits of additional information, i.e., the upper 3 bits = 2 and the lower 3 bits = 6 are embedded into the image data. The CPU 32 selects block 2 of the image data shown in Fig. 13B so as to embed the upper 3 bits of the additional information, and also selects block 6 of the image data shown in Fig. 13C so as to embed the lower 3 bits of the additional

In step S25, the CPU 32 writes (overwrites) the coded first line and the coded 801st line into the frame memory 31.

If the CPU 32 determines in step S26 that the coded image equivalent to one frame has been processed, the coded data stored in the frame memory 31 is output via the output I/F 34, and the coding operation is completed.

The configuration of a decoder used in this embodiment is similar to that of the decoder 6 shown in Fig. 7, and an explanation thereof will thus be omitted. The operation of decoding the coded data performed by the decoder 6 is discussed below with reference to the flow chart of Fig. 14.

In step S31, the CPU 43 selects and extracts one image block shown in Fig. 13A (upper left image block in Fig. 13A) used for decoding 6-bit additional information. In this case, by referring to the continuous area data stored in the program memory 44 in step S30, the CPU 43 selects and extracts image blocks only in a continuous area. In this embodiment, the first line and the 801st line are wholly selected and extracted, assuming that the whole areas of the first line and the 801st line are continuous areas.

Subsequently, in step S33, the CPU 43 calculates a difference between the DCT coefficient of the currently given image block and that of the previously given image block, and stores the calculated difference and the DCT coefficient of the currently given image block. If the DCT coefficient of the

The embedded-coding operation performed by the embedding coder 3 is discussed below with

reference to the flow chart of Fig. 17.

In step S41, the CPU 32 controls image data equivalent to one frame to be transferred from the image database 1 to the frame memory 31, and also detects a similar area of the image data and stores the position of the similar area in the program memory 33 as similar area data.

More specifically, the CPU 32 detects a similar area of the image data consisting of $56 (=7 \times 8) \times 1600 (=200 \times 8)$ pixels shown in Fig. 18A. The image data is divided into image blocks, for example, each block consisting of 8×8 pixels, as shown in Fig. 18A, and the CPU 32 detects the similarity between a given image block and peripheral image blocks.

The CPU 32 scans the given image block in the order of raster scanning so as to calculate the similarity between the given image block and each of the peripheral image blocks on the left and right sides. The calculating similarity method is as follows. The CPU 32 performs matching of the given image block with each of the left and right adjacent image blocks while changing the size, position, and translation of the given image block by predetermined amounts. The degrees of matching are then normalized and averaged. The CPU 32 then stores the averaged degree of matching in the program memory 33 as a similarity evaluation value. If the leftmost image block or the rightmost image block is a given image block, one of the degrees of matching with the adjacent image blocks on the left and right sides is determined to be the degree of matching of the given image block. The CPU 32 then determines that image blocks whose similarity evaluation values (degrees of matching) are equal to or greater than a predetermined threshold are similar areas, and stores the positions of such image blocks in the program memory 33. In this case, some image blocks within the calculated similar area may be determined to be a dissimilar area because of an influence of, for example, noise. Accordingly, after detecting a similar area, the CPU 43 makes corrections by substituting some dissimilar image blocks with image blocks of a similar area by enlarging and reducing the similar area.

In step S42, the CPU 32 then receives additional information from the additional-information database 2 in units of 6 bits (3 bits + 3 bits).

In step S43, the CPU 32 selects and extracts the first line and the 101st line shown in Fig. 18A into which the above-described 6-bit additional information is to be embedded. Simultaneously, by referring to the similar area data stored in the program memory 33 in step S41, the CPU 32 selects and extracts only the similar areas of the first line and the 101st line. In this embodiment, the first line and the 101st line are wholly selected and extracted, assuming that the whole areas of the first line and the 101st line are similar areas.

In step S44, the CPU 32 embeds the additional information into the image data by swapping the image of the first line with the image of the 101st line. An embedding method is discussed below with reference to Figs. 18A and 18B.

Fig. 18A illustrates the pixel values of the image data of the first line and those of the 101st line before the additional information is embedded. The variation pattern of the pixel values, that is, the

In this embodiment, it is assumed that a total of 6 bits, i.e., the upper 3 bits = 2 and the lower 3 bits = 6, are to be embedded into the image data as the additional information. The CPU 32 selects block 2 of the first line of the image data shown in Fig. 18A so as to embed the upper 3-bit additional information, and also selects block 6 of the 101st line of the image data shown in Fig. 18A so as to embed the lower 3-bit additional information. The CPU 32 then swaps the image data of block 2 with the image data of block 6, thereby coding the image data shown in Fig. 18A into the image data shown in Fig. 18B.

The CPU 32 determines in step S46 whether the image data equivalent to one frame has been processed. If the outcome of step S46 is no, the process returns to step S42 in which additional information is again received, and in step S43, the CPU 32 selects the subsequent lines, i.e., the second line and the 102nd line.

A detailed description is given below, with reference to the drawings, of the operation of decoding the coded data embedded with additional information by utilizing the similarity of images according to a further embodiment of the present invention..

The decoding processing for the coded data performed by the decoder 6 is stated below with reference to the flow chart of Fig. 19.

In step S51, the CPU 43 selects and extracts one image block shown in Fig. 18A (upper left image block shown in Fig. 18A) used for decoding the 6-bit additional information. In this case, by referring to the similar area data stored in the program memory 44 in step S50, the CPU 43 selects and extracts the image blocks only within the similar area. In this embodiment, the first line and the 101st

decoding processing is completed.

The image data stored in the frame memory 41 to be decoded into the original image may be sequentially output in units of two lines, such as the first line and the 101st line, via the output I/F 42. Alternatively, the image data may be wholly output via the output I/F 42 after the decoding processing is completed.

The similarity is now explained while referring to the drawings in Figs. 16A and 16B.

When encoding the fractal image as shown for instance in Fig. 16A, in the embedding coder 3 a portion of the fractal image is replaced with a dissimilar fractal image, according to the additional information and encoding of the fractal image is thus performed. More specifically, in the embedding coder 3, for instance, a portion of the fractal image having the shape of a tree leaf as shown in Fig 16A is replaced with the triangular shape in Fig.16B. In Fig. 16B, portions indicated by D1 and D2 are triangular shapes. Further, in the embedding coder 3, information such as the position of the fractal image substituted with the triangular shape and the size and quantity of triangles being substituted with the fractal images are determined according to the additional information.

In the decoder 6, the fractal image and the additional information is decoded, for example, as follows.. For example, in Fig. 16B, substitution with the triangular figure is not performed on the section with a dotted line square shape. In the decoder 6 the section with the dotted line square is set as a teacher image, and a shape (in this case the triangle) which is not similar to the teacher image is then searched for. Further, in the decoder 6, the triangles which are not similar to the teacher image are substituted with the image (fractal image) generated from the reference figure of the fractal image contained in the teacher image in order to decode the original (source) fractal image shown in Fig. 16A. In the case discussed above, it is necessary to detect the reference figure of the fractal image contained in the teacher image in the decoder 6, which is performed, for example, as follows. The reference figure of the fractal image of Fig. 16B is searched based on the similarity between the teacher image and portions other than the teacher image, and, self-similarity of the teacher image. Then, the figure which is able to express the portions other than the teacher image most efficiently is detected as the reference figure..

Also, in the decoder 6, the pattern for generating the original fractal image is recognized, and based on this pattern, images which should be substituted for the triangles are generated by using the reference figure. In the decoder 6, in order to generate an image which should be substituted for the triangles, the size, the position, and the translation of the reference figure are specified based on the above-described pattern. Then, the reference figure is operated according to the specified size, the position, and the translation, thereby creating the image (fractal image) which is to be substituted for the triangles .

As described above, the embedding coder 3 codes a coding object image in accordance with additional information so that decoding will be performed by utilizing an energy distribution of the image. The decoder 6 decodes coded data into the original image and the additional information without any

overhead for decoding by utilizing an energy distribution of the image.

Since additional information is embedded into a coding object image, a resulting coded image is rendered different from the original state and unrecognizable as valuable information. That is, encryption of the coding object image without any overhead is realized.

Further, completely reversible digital watermarking is realized. For example, in the conventional digital watermarking, the lower bits of pixel values that do not much influence the image quality are simply changed to values corresponding to a digital watermark. However, it is difficult to restore the lower bits to the original values. Therefore, changing the lower bits as digital watermarking causes deterioration in the image quality of a decoded image. In the embedded coding of the invention, in the case where coded data is decoded by utilizing an energy distribution of the original image, the original image having no deterioration and additional information are obtained. Therefore, the image quality of a decoded image is not deteriorated even if the additional information is used as digital watermarking information.

Since embedded additional information is extracted by decoding coded data into an image, side information is provided without any overhead. In other words, since additional information is embedded into an image without any overhead that is usually necessary to extract the additional information, coded data that is obtained as a result of the embedding is compressed by an amount corresponding to the additional information. For example, if a half of an image is assigned to a coding object and the other half is assigned to additional information, and if the latter half of the image is embedded into the half image as the coding object, the image is simply compressed into 1/2 of the original image.

Since coded data is decoded by utilizing an energy distribution of the original image which is, so to speak, a statistical quantity, the error resistance is high. That is, robust coding which is coding high in robustness is realized.

Since coded data is decoded by utilizing an energy distribution of the original image, there is a possibility that more additional information is embedded when the energy distribution is more characteristic, that is, when, in the case of an image, the activity of the image is higher or its redundancy is lower. As described above, coded data obtained as a result of embedding of additional information is compressed by an amount corresponding to the additional information. That is, the compression ratio is higher when the activity of the image is higher or the redundancy of the image is lower. In contrast, in the MPEG (Moving Picture Experts Group) scheme, for example, which is a conventional coding scheme, basically the compression ratio is lower when the activity of an image is higher or the redundancy of an image is lower. The embedded coding scheme of the invention is much different from the conventional coding schemes in this respect.

An image can be provided with a voice used as a key by making an image a coding object and employing, as additional information, information of a different medium than an image, for example, a voice. More specifically, on the coding unit 10, a voice spoken by a contractor, such as "Open sesame,"

A voice can be provided with an image used as a key (e.g., voice response after face recognition) by making a voice a coding object and employing, as additional information, information of a media different than a voice, for example, an image. More specifically, on the coding unit 10, an image of the face of a user is embedded into, for example, a voice as a response to the user. On the decoding unit 20, the face of a user is photographed and a voice in which a face image that matches the photographed image is embedded is output. In this manner, a voice response system that makes voice responses that are different for respective users is realized.

For example, it is also possible that one of an image and a voice that constitute a television broadcast signal and are, so to speak, synchronized with each other is embedded into the other. In this case, what is called a true integrated signal can be realized in which pieces of information of different media are integrated with each other.

For example, coding in which higher-layer information having a smaller information quantity than lower-layer information is generated (what is called layered coding) is realized without increasing the data amount by embedding a reduced image into the original image or by embedding a decimated voice into the original voice.

For example, by embedding an image to serve as a key for retrieving each original image into each original image, a database is realized in which an image is retrieved based on a key image.

An image that is supplied from the image database 1 is supplied to a frame memory 31. The frame memory 31 temporarily stores, for example, on a frame-by-frame basis, the image supplied from the image database 1.

The program memory 33 is formed of, for example, a ROM (read-only memory) or a RAM (random access memory), and stores a computer program for causing the CPU 32 to perform an embedded coding operation.

Fig. 21 shows an example of the functional configuration of the embedding coder 3 of Fig. 20. The functional configuration shown in Fig. 21 is realized by the CPU 32 executing a computer program stored in the program memory 33.

A swap information generation section 36 reads out additional information from the additional information database 2, and generates, based on the additional information, swap information that indicates how the positions of the respective columns of the one-frame image stored in the frame memory 31 should be rearranged. When the one-frame image stored in the frame memory 31 consists of M-row/N-column pixels, the nth column (from the left end) and the n'th column of the image are to be swapped. Then, the swap information generation section 36 generates swap information that correlates

n with n', where n and n' are integers of 1 to N.

Where a one-frame image consists of N columns, there are N! ("!" means factorial) kinds of manners of rearranging the columns if all the columns are to be subjected to the rearrangement. Therefore, additional information of $\log_2(N!)$ bits is embedded in one frame.

Swap information generated by the swap information generation section 36 is supplied to a swapping section 37. The swapping section 37 rearranges the positions of the respective columns of the one-frame image stored in the frame memory 31 according to the swap information that is supplied from the swap information generation section 36.

An embedded coding process that is executed in the embedding coder 3 of Fig. 21 will be described below with reference to a flowchart of Fig. 22.

Stored images are read out from the image database 1, and are sequentially supplied to the frame memory 31 and stored therein.

In step S61, the swap information generation section 36 reads out, from the additional information database 2, additional information of a data amount that can be embedded into a one-frame image. For example, as described above, when a one-frame image consists of N columns and all the columns are to be subjected to rearrangement, additional information of a maximum of $\log_2(N!)$ bits can be embedded into one frame. Additional information of $\log_2(N!)$ bits or less is thus read out from the additional information database 2.

The process then goes to step S62, where the swap information generation section 36 generates swap information based on the additional information that was read out in step S61. More specifically, based on the additional information, the swap information generation section 36 generates swap information that indicates to which columns each of the second to Nth columns (excluding the first column), for example, among the first to Nth columns of the processing object frame that is stored in the frame memory 31 should be moved. The swap information is supplied to the swapping section 37.

When the swapping section 37 receives the swap information from the swap information generation section 36, the process goes to step S63, where the swapping section 37 rearranges the positions of the respective columns of the processing object frame that is stored in the frame memory 31 according to the swap information. A column-position-rearranged frame is read out from the frame memory 31 and output as coded data. A column-position-rearranged frame may be read out after the memory positions of the respective columns of the image stored in the frame memory 31 have been rearranged. Alternatively, the CPU 32 may perform a control so that output data will be rendered in a "data rearranged state" through changing of readout order.

In this embodiment, as described above, although the swap information includes information indicating to which columns each of the second to Nth columns should be moved, it does not include information indicating to which column the first column should be moved. Therefore, while the swapping section 37 moves the second to Nth columns, it does not move the first column.

When all of the second to Nth columns of the processing object frame have been subjected to the rearrangement, the process goes to step S64, where it is judged whether the frame memory 31 stores a frame that has not been made an object of processing. If it is judged that the frame memory 31 stores such a frame, the process returns to step S61 and operations similar to the above are performed for the frame that has not been processed yet.

If it is judged in step S64 that the frame memory 31 does not store a frame that has not been made an object of processing, the embedded coding process is finished.

According to the above embedded coding process, a one-frame image is coded into coded data in the following manner.

For example, if the additional information corresponds to rearrangement that the second column of the processing object frame is moved to the sixth column (indicated by reference numeral 411), the third column to the ninth column 412, the fourth column to the seventh column 413, the fifth column to the third column 414, the sixth column to the eighth column 415, the seventh column to the fourth column 416, the ninth column to the second column 417, the eighth column to the fifth column 418, ..., and the Nth column to the Nth column, the swap information generation section 36 generates swap information indicating such rearrangement. According to the above swap information, the swapping section 37 rearranges, for example, a frame shown in Fig. 23A according to a frame shown in Fig. 23B, that is, in such a manner that the second column is moved to the sixth column (indicated by reference numeral 411), the third column to the ninth column 412, the fourth column to the seventh column 413, the fifth column to the third column 414, the sixth column to the eighth column 415, the seventh column to the fourth column 416, the ninth column to the second column 417, the eighth column to the fifth column 418, ..., and the Nth column to the Nth column. As a result, the image of Fig. 23A is coded into an image shown in Fig. 23C.

The relationship between the rearrangement and the embedding information will be described below briefly with reference to Fig. 23B.

As indicated by reference numeral 411, the destination of movement of the second column is determined from among the available regions of eight columns. Since there are eight kinds of choices, the embedding coder 3 can embed additional information that is any of 0, 1, 2, 3, 4, 5, 6, and 7, for example. In the example of Fig. 23B, since the second column is moved to the sixth column, that is, the fifth region, additional information "4" is embedded.

Then, as indicated by reference numeral 412, the movement destination of the third column is determined from among the available regions of seven columns. Since there are seven kinds of choices, the embedded encoder 3 can embed additional information that is any of 0, 1, 2, 3, 4, 5, and 6, for example. In the example of Fig. 23B, since the third column is moved to the ninth column, that is, the seventh region, additional information "6" is embedded.

From the next step onward, additional information is embedded into the image by operations

Instead of the above rearrangement scheme in which operations of moving each column to a column that is distant from it by pixels of the same number as the value of additional information are performed sequentially, when the additional information is image data, each column may be moved according to a feature quantity of the image data such as a histogram, DR, variance.

The swapping section 37 moves, according to additional information, the positions of the pixels of each column as a set of one or more pixels constituting the image stored in the frame memory 31. The additional information is thus embedded into each column through the rearrangement by the swapping section 37. The original image is restored by performing rearrangement that is reverse to the rearrangement performed by the swapping section 37, and information indicating what rearrangement was performed is used as additional information. Therefore, the embedding coder 3 can embed additional information into an image without deteriorating its image quality and without increasing the data amount.

If there is no column that is located at the correct position in coded data, it takes time to restore an image and additional information by utilizing the correlation of the image in the above-described manner. In the embedded coding process of Fig. 22, the first column of each frame is not moved and output as part of coded data as it is.

Fig. 24 shows an example of the hardware configuration of the decoder 6 shown in Fig. 1 which decodes coded data that is output from the embedding coder 3 of Fig. 21 into the original image and the additional information by utilizing the correlation of the image.

Coded data, that is, an additional-information-embedded image (also called an embedded image), is supplied to a frame memory 41. The frame memory 41 temporarily stores the embedded image, for example, in units of frames. The frame memory 41 is configured similarly to the frame memory 31 shown in Fig. 20, and by switching banks, an embedded image can be processed in real time even if it is a moving picture..

A CPU 43 executes a program stored in a program memory 44, and controls the decoder 6 so that a decoding operation is performed. That is, the CPU 43 controls the decoder 6 so that the embedded image stored in the frame memory 41 is decoded into the original image and the additional information by utilizing the correlation of the image. More specifically, the CPU 43 calculates correlation values between the latest decoded column and other columns among the columns constituting the embedded image. The CPU 43 performs, for every column constituting the embedded image, an operation of moving the column having the maximum correlation value with the latest decoded column to the position immediately on the right of the latest decoded column. The CPU 43 restores the original image in this manner and also restores the additional information based on the manner of rearrangement of the positions of the respective columns of the embedded image in decoding the embedded image into the original image.

The program memory 44 is configured similarly to, for example, the program memory 33 shown in Fig. 20, and stores a computer program for causing the CPU 43 to perform a decoding operation.

Fig. 25 shows an example of the functional configuration of the decoder 6 of Fig. 24. The functional configuration shown in Fig. 25 is realized by the CPU 43 executing a computer program stored in the program memory 44.

As described above with reference to Fig. 24, the frame memory 41 temporarily stores an embedded image.

A swapping section 46 calculates correlation values between the latest one of the columns that have been moved to the original positions and other columns (i.e., the columns that have not been returned to their original positions) in the processing object frame stored in the frame memory 41. Based on those correlation values, the swapping section 46 rearranges the positions of the columns in the processing object frame that have not been returned to their original positions and thereby returns those columns to their original positions (i.e., restores the positions of those columns). Further, the swapping section 46 supplies a swap information conversion section 47 with swap information that represents how the columns of the frame have been rearranged.

The swap information conversion section 47 restores the additional information that is embedded in the embedded image based on the swap information that is supplied from the swapping section 46, that is, the corresponding relationship between the positions of the respective columns of the processing object frame before the rearrangement and those after the rearrangement.

The frame memory 41 sequentially stores embedded images (i.e., coded data) supplied thereto , for example, in units of frames.

If it is judged in step S72 that variable n is smaller than or equal to $N-1$, the process goes to step S73, where the swapping section 46 reads out the pixels (or the pixel sequence) of the n th column of the processing object frame stored in the frame memory 41 and generates a vector (i.e., a column vector) v_n in which the pixel values of the respective pixels of the n th column are arranged as elements. In this embodiment, since each frame consists of pixels of M rows, as described above, the column vector v_n is an M -dimensional vector. The same thing applies to a vector v_k (described later).

In step S76, in the swapping section 46, a correlation value between the nth column and the kth column is calculated by using the column vectors v_n and v_k .

$$d(n, k) = |v_n - v_k|$$

$$= (\sum (A(m, n) - A(m, k))^2)^{1/2} \quad \dots (1)$$

In the swapping section 46, the reciprocal $1/d(n, k)$ of the distance $d(n, k)$ between the column vectors v_n and v_k is calculated as a correlation value between the n th column and the k th column.

If it is judged in step S77 that variable k is not smaller than or equal to N-1, the process goes to

Variable n is incremented by 1 in step S81, and the process returns to step S72. Thereafter, steps S72 to S81 are repeatedly executed until it is judged in step S72 that variable n is not smaller than or equal to N-1.

When variable n is incremented to 2, in the above-described manner the column of the embedded image having the maximum correlation value with the second column which is returned to the original position is swapped with the third column that is immediately on the right of the second column. From the correlation of the image, the column having the maximum correlation value with the second column should be the third column of the original image. Therefore, the third column of the original image that was moved to a certain column of the embedded image in the embedded coding operation is now returned to the original position.

If it is judged in step S72 that variable n is not smaller than or equal to N-1, that is, when all of the second to Nth columns constituting the embedded image have been returned to their original positions by utilizing the correlation of the image and the embedded image stored in the frame memory 41 has thereby been decoded into the original image, the process goes to step S82, where a decoded image is read out from the frame memory 41. In step S82, swap information that represents how the second to Nth columns of the embedded image were rearranged when the swapping section 46 decoded the embedded image into the original image is output to the swap information conversion section 47. The swap information conversion section 47 restores the additional information that was embedded in the embedded image based on the swap information supplied from the swapping section 46, and outputs the restored additional information.

The process then goes to step S83, where it is judged whether the frame memory 41 stores an

embedded image frame that has not been processed. If it is judged that such a frame is stored, the process returns to step S71, where operations similar to the above are repeated for the embedded image frame that has not been processed.

If it is judged in step S83 that the frame memory 41 does not store a frame that has not been processed, the decoding process is finished.

As described above, the decoder 6 decodes coded data, that is, an image in which additional information is embedded, into the original image and the additional information by utilizing the correlation of the image. The decoder 6 can decode coded data into the original image and the additional information even without any overhead for decoding. Therefore, the embedding of additional information causes no deterioration in image quality in a decoded image that is produced by the decoder 6.

In the decoding process of Fig. 26, the decoder 6 calculates correlation values between the latest decoded column (the first column that was not moved in embedded coding, when $n = 1$, for example) and the columns that have not been decoded, and detects a column that should be moved to the position immediately on the right of the latest decoded column based on the calculated correlation values. The decoder 6 may detect a column that should be moved to the position immediately on the right of the latest decoded column by calculating correlation values between a plurality of columns that have been decoded and the columns that have not been decoded.

Figs. 27 to 29 show simulation results of the above embedded coding process and decoding process.

Fig. 27 shows an original image that is to be subjected to an embedded coding operation and that consists of 512 (horizontal) x 832 (vertical) pixels when the longitudinal direction is the vertical direction.

Fig. 28 shows a processing result of the embedded coding operation that was performed on the image of Fig. 27. Additional information of $\log_2(512!)$ bits is embedded in the coded image of Fig. 28. As is apparent from Fig. 28, as described above, the embedded coding has a function of image encryption.

Fig. 29 shows a decoded image produced by decoding the result (see Fig. 28) of the embedded coding operation by a decoding operation. A comparison between Figs. 27 and 29 shows that the original image is restored without any deterioration in image quality. If an embedded image is correctly decoded into the original image by a decoding process, additional information can also be restored correctly based on a manner of rearrangement of the columns of the embedded image in the decoding.

In the above example, the embedding coder 3 performs embedded coding on, for example, a coding object image consisting of N columns as shown in Fig. 30A by fixing the first column and by rearranging the second to N th columns according to additional information. Alternatively, the embedding coder 3 may perform embedded coding, as illustrated in Fig. 30B, on a coding object image consisting of H lines by fixing the first line and by rearranging the second to H -th lines according to

That is, in the case of Fig. 26, the reciprocal of the distance between column vectors v_n each having, as elements, the pixel values of the constituent pixels of the corresponding column of the image of Fig. 30A is defined as correlation, and coded data is decoded by using only the correlation thus defined. In the decoder 6, first, the column corresponding to the column vector having the smallest distance from the column vector of the fixed first column is set as the second column. Then, in the decoder 6, the column corresponding to the column vector having the smallest distance from the column vector of the second column is set as the third column. Similar operations are repeated from the next step onward, whereby the original image is restored and the embedded additional information is restored based on how the second to Nth columns were rearranged.

If in the swapping section 46 the column vectors having the smallest distances are detected in order starting from the state that the subject column is the first column in the manner described above, a locus indicated by a thick broken line in Fig. 31 is drawn. That is, column vectors are detected in order of $v_1, v_2, v_{13}, v_3, v_{14}, v_{15}, v_4, v_5, v_6, \dots$. Therefore, in the swapping section 46, column vectors are not detected in correct order when only the correlation (in this case, the distance between column vectors) is used, and, as a result, neither the image nor the additional information can be restored correctly.

Further, in the swapping section 46, a difference vector between the column vector v_3 of the third column and the column vector v_2 of the second column is calculated and the column corresponding to the column vector closest to a point that is represented by a vector obtained by adding the difference vector to the column vector v_3 is set as the fourth column. From the next step onward, the remaining columns to the Nth column are determined in similar manners.

By utilizing, as described above, in the swapping section 46, not only the correlation between the n th column and the $(n+1)$ th column but also the continuity between the column vector v_n of the n th column and the column vector v_{n+1} of the $(n+1)$ th column, that is, in this case, the fact that the variation of the difference vector $v_{n+1} - v_n$ is continuous, the column vectors are detected in such correct order that a

locus is drawn in the manner as indicated by the thin broken line in Fig. 31, and the image and the additional information are restored correctly.

In the embodiment of Figs. 23A, 23B, and 23C,, the pixels of the coding object image except the pixels of the first column are rearranged in units of columns based on the additional information, whereby embedding of the additional information into the image, that is, the embedded coding, is performed. The embedded coding can be performed in other ways. For example, the pixels of a coding object image may be rearranged in units of rows, or the position of a sequence of pixels, located at the same position, of a prescribed number of frames arranged in the time domain may be swapped.

Another example of the embedded coding is such that the pixels of a coding object image are rearranged in units of columns and the pixels of a resulting image are further rearranged in units of rows.

For example, the columns of an image consisting of M (vertical) x N (horizontal) pixels as shown in Fig. 33 are rearranged based on additional information by the embedding coder 3 to produce an embedded image as shown in Fig. 34A. In Fig. 34A, the first column of the image of Fig. 33 is moved to the fifth column, the second column to the Nth column, the third column to the first column, the fourth column to the second column, the fifth column to the fourth column, the sixth column to the third column, ..., the Nth column to the sixth column.

For example, the rows of the image of Fig. 34A are rearranged based on additional information by the embedding coder 3 to produce an embedded image as shown in Fig. 34B. In Fig. 34B, the first row of the image of Fig. 34A is moved to the third row, the second row to the fifth row, the third row to the second row, the fourth row to the Mth row, the fifth row to the first row, ..., the Mth row to the fourth row.

If a column that has not been moved exists, for example, immediately on the left of the first column, the embedded image of Fig. 34B is decoded into the original image of Fig. 33 by the decoder 6 executing the decoding process described above with reference to Fig. 26 by using that column as the new first column. That is, in the embedded image produced by the rearrangement in both of the column and row directions, the terms themselves to be added together in the summation of Equation (1) are not changed though their order is changed. Therefore, the distance $d(n, k)$ that is calculated by Equation (1) remains the same in the case where only the columns have been rearranged and in the case where both of the columns and the rows have been rearranged as long as the image that has been subjected to the embedded coding is the same. The embedded image produced by rearranging both of the columns and the rows is also decoded into the original image and the additional information by the decoding process of Fig. 26 in the same manner as the embedded image produced by rearranging only the columns is done.

It is understood from the above discussion that when the embedding coder 3 rearranges both of the columns and rows, which of the columns and the rows are rearranged first does not influence a decoding operation. Therefore, the embedding coder 3 may first rearrange either the columns or the rows, and the decoder 6 may first rearrange either the columns or the rows. It is even possible for each

of the coder 3 and the decoder 6 to alternately rearrange the columns and the rows.

Where the embedding coder 3 rearranges only the columns in an embedded coding operation, a manner of rearrangement of the columns of an embedded image when the decoder 6 decodes the embedded image into the original image becomes a decoding result of the additional information. Where the embedding coder 3 rearranges both of the rows and the columns, to what position (m' , n') of a decoded image the pixel at an m th-row, n th-column position (m , n), for example, of an embedded image is moved becomes a decoding result of the additional information.

In the embedding coding process of Fig. 22 only the first column of a coding object image is fixed, and the decoder 6 rearranges the other columns of an embedded image by using the first column as, so to speak, a reference of decoding. The reference of decoding is not limited to the first column, and may be the last, N th column or any other column as long as it is set in the embedding coder 3 and the decoder 6. Further, the reference of decoding needs not always be the pixels of one column and may be, in an extreme case, one pixel.

As discussed above, the embedding coder 3 uses, for example, the first column as a reference of decoding and rearranges the other columns of an embedded image by utilizing the correlation of the image. In this case, if one column is erroneously moved, the possibility is high that an erroneous column is moved to the next column (in this embodiment, the column immediately on the right of the erroneously moved column). In this case, the decoder 6 cannot restore the original image and hence cannot restore the correct additional information.

In the embedded coding process, a plurality of columns may be left as references of decoding, that is, to exclude those columns from an object of rearrangement.

For example, where the embedding coder 3 performs rearrangement by using a set of pixels of an image arranged in the column direction as a unit of rearrangement, the embedding coder 3 may set every other column (hatched in Fig. 35) as a reference of decoding and set the remaining columns (i.e., the columns indicated by blanks in Fig. 35) as an object of rearrangement.

In the case of Fig. 35, if the image has $2N$ columns, the data amount of additional information that can be embedded by the embedding coder 3 amounts to $\log_2(N!)$ bits.

The embedding coder 3 may use a unit of rearrangement that is smaller than a column or a row, that is, a set of one or more pixels.

For example, as shown in Fig. 36, the embedding coder 3 can perform rearrangement by dividing each column of an image into sets of one or more (e.g., five) consecutive pixels and using such a set as a unit of rearrangement. As shown in Fig. 36, the embedding coder 3 can classify the units of rearrangement into two categories in checkered pattern and can set one category (e.g., the portions indicated by blanks in Fig. 36) as an object of rearrangement and set the other (hatched in Fig. 36) as references of decoding. In this case, if the number of rows, that is, the number of pixels in the column direction, of the image is such as to accommodate M units of rearrangement and the image has $2N$

For example, as shown in Fig. 37, the embedding coder 3 can extract pixels of each column of an image by a prescribed number of pixels (e.g., six pixels) and perform rearrangement by using a set of extracted pixels (e.g., pixels indicated by "o" in Fig. 37, pixels indicated by "x", or pixels indicated by "Δ") as a unit of rearrangement. As shown in Fig. 37, the embedding coder 3 can classify the pixels constituting the image into two categories in checkered pattern, and can set one category (e.g., the portions indicated by blanks in Fig. 37) as an object of rearrangement and set the other (hatched in Fig. 37) as references of decoding. In this case, if a set of pixels obtained by extracting pixels of each column of the image by 2M pixels (six pixels in Fig. 37) is used as a unit of rearrangement and the image has N columns, the data amount of additional information that can be embedded into the image amounts to $\log_2\{(M \times N)!\}$ bits. The data amount amounts to $\log_2\{(M \times N)!\}$ because the embedding coder 3 can perform embedding in units of columns as indicated by, for example, reference numerals 421 and 422 by using the sets indicated by "o" as units of rearrangement.

As described above, no particular limitations are imposed on the unit of rearrangement used in the embedded coding and the decoding.

From the viewpoint of the decoding precision, it is preferable that a pixel as an object of rearrangement be adjacent to as many pixels as references of decoding as possible. Therefore, the example of Fig. 37 is most desirable. From the viewpoint of the decoding precision, it is preferable that there are as many pixels as references of decoding as possible.

It is desirable that the number of pixels as references of decoding and their arrangement pattern be set in accordance with the purpose of the embedded coding and the decoding in consideration of the decoding precision, the data amount of additional information to be embedded, and the encryption effect.

The encryption effect is also weakened if a certain column is moved to a nearby column or columns that are close to each other are moved while keeping their positional relationship. It is thus

necessary to avoid such rearrangement. In the embedded coding operation of the embedding coder 3, it is possible to impose limitations that each column should be moved to a column that is distant from that column by more than a prescribed distance and that columns that are close to each other should be moved to columns that are distant from those columns by more than a prescribed distance.

Where an image as an object of embedded coding is a color image that consists of, for example, RGB component signals, the embedding coder 3 may move a set of RGB components to the same position or rearrange the RGB components individually. Where the embedding coder 3 moves a set of RGB components to the same position, the data amount of additional information that can be embedded is smaller but the decoding accuracy in the decoding can be higher than in the case where the embedding coder 3 moves the RGB components individually. Conversely, where the embedding coder 3 moves a set of RGB components individually, the decoding accuracy in the decoding is lowered but the data amount of additional information that can be embedded is larger than in the case where the embedding coder 3 moves a set of RGB components to the same position.

There are no particular limitations on the type of additional information. For example, an image, a voice, text, a computer program, a control signal, and other kinds of data may be used as additional information. Where part of an image stored in the image database 1 is used as additional information and the remaining part is used as a coding object that is supplied to the frame memory 31, the former part of the image as the additional information is embedded into the latter part, thereby implementing image compression.

Although the embodiment of the invention is directed to an image, the invention may be implemented in such a manner that data sequences of a prescribed time of a voice are rearranged.

Although in the embodiment the embedded coding operation or the decoding operation is performed by executing a computer program under the control of the CPU 32 or 43, it may be performed by dedicated hardware.

Although in the embodiment a computer program to be executed under the control of the CPU 32 or 43 is stored in the program memory 33 or 44, the computer program may be provided as a signal via a recording medium such as a semiconductor memory, a magnetic tape, a magnetic disk, an optical disc, a magneto-optical disc, or a phase change disc or a transmission medium such as the Internet, ground waves, a satellite channel, a public network, or a CATV (cable television) network.

Referring to Figs. 38A to 38C, a description will be given of a recording medium on which the above-described computer program is recorded, through which the program is installed in a computer and is executed by the computer. A signal indicating the above-described program which is supplied to a computer via a transmission medium is also discussed below.

As shown in Fig. 38A, a program is recorded in advance on a hard disk 602 or a semiconductor memory 603 as a recording medium that is incorporated in a computer 601.

Alternatively, as shown in Fig. 38B, a program is recorded temporarily or permanently on a

recording medium such as a floppy disk 611, a CD-ROM (compact disc read-only memory) 612, an MO (magneto-optical) disc 613, a DVD (digital versatile disc) 614, a magnetic disk 615, or a semiconductor memory 616.

In addition to a method in which a program is installed in a computer from any of the above recording media, as shown in Fig. 38C, it is possible to transfer a program by radio from a download site 621 to the computer 601 via an artificial satellite 622 for digital satellite broadcast or transfer a program by wire from the download site 621 to the computer 601 via a network 631 such as a LAN (local area network) or the Internet, and install it in the computer 601 so that it is stored in, for example, the hard disk 102 incorporated in the computer 601.

The steps described by the programs for executing various processes of the invention need not always be executed in a time-series manner in order as described in the flowcharts, and the invention includes a process in which the steps are executed in parallel or individually (e.g., a parallel process and an object process).

Fig. 39 shows an example configuration of the computer 601 shown in Figs. 38A and 38C.

As shown in Fig. 39, the computer 601 incorporates a CPU (central processing unit) 642. An input/output interface 645 is connected to the CPU 642 via a bus 641. When receiving, via the input/output interface 645, a command that has been produced by the user operating an input section 647 such as a keyboard or a mouse, the CPU 642 executes a program that is stored in a ROM (read-only memory) 643 corresponding to the semiconductor memory 603 shown in Fig. 38A in accordance with the command. The flowcharts shown in Figs. 5, 9, 12, 14, 17, 19, 22, and 26 are executed as this program. Alternatively, the CPU 642 loads, into a RAM (random access memory) 644, a program that is stored in the hard disk 602, a program transferred via the satellite 622 or the network 631, received by a communication section 648, and installed in the hard disk 602, or a program read out from the floppy disk 611, the CD-ROM 612, the MO disc 613, the DVD 614, the magnetic disk 615, or the semiconductor memory 616 that is mounted in a drive 649 and installed in the hard disk 602, and executes the program. For example, the CPU 642 outputs a processing result to a display section 646 such as an LCD (liquid crystal display) via the input/output interface 645, when necessary.

1. A coding device for coding first information according to second information, comprising:
receiving means for receiving the first information and the second information; and
coding means for coding the first information according to the second information so that decoding is performed by utilizing an energy distribution possessed by the first information.

3. A coding device according to claim 1, wherein the first and second information are information of identical or different media.

5. A coding method for coding first information according to second information, , comprising the steps of:

receiving the first information and the second information; and

coding the first information according to the second information so that decoding is performed by utilizing an energy distribution possessed by the first information.

6. A decoding device for decoding coded data obtained by coding first information according to second information, comprising:

- receiving means for receiving the coded data; and
- decoding means for decoding the coded data into the first information and the second information by utilizing an energy distribution possessed by the first information.

8. A decoding device according to claim 6, wherein the first information and the second information are information of identical or different media.

9. A decoding device according to claim 6, wherein the first information is an image.

coding the first information according to the second information by said coding device so that decoding is performed by utilizing an energy distribution possessed by the first information, and

decoding the coded data, by said decoding device, into the first information and the second information by utilizing the energy distribution possessed by the first information.

18. A storage medium according to claim 17, wherein the coded data is obtained by coding the first information according to the second information so that decoding is performed by utilizing at least one of the correlation, continuity, and similarity of the first information.

20. A storage medium according to claim 17, wherein the first information is an image.

| | 1980 | 1981 | 1982 | 1983 | 1984 | 1985 | 1986 | 1987 | 1988 | 1989 | 1990 | 1991 | 1992 | 1993 | 1994 | 1995 | 1996 | 1997 | 1998 | 1999 | 2000 | 2001 | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 | 2010 | 2011 | 2012 | 2013 | 2014 | 2015 | 2016 | 2017 | 2018 | 2019 | 2020 | 2021 | 2022 | 2023 | 2024 | 2025 | 2026 | 2027 | 2028 | 2029 | 2030 | 2031 | 2032 | 2033 | 2034 | 2035 | 2036 | 2037 | 2038 | 2039 | 2040 | 2041 | 2042 | 2043 | 2044 | 2045 | 2046 | 2047 | 2048 | 2049 | 2050 | 2051 | 2052 | 2053 | 2054 | 2055 | 2056 | 2057 | 2058 | 2059 | 2060 | 2061 | 2062 | 2063 | 2064 | 2065 | 2066 | 2067 | 2068 | 2069 | 2070 | 2071 | 2072 | 2073 | 2074 | 2075 | 2076 | 2077 | 2078 | 2079 | 2080 | 2081 | 2082 | 2083 | 2084 | 2085 | 2086 | 2087 | 2088 | 2089 | 2090 | 2091 | 2092 | 2093 | 2094 | 2095 | 2096 | 2097 | 2098 | 2099 | 2100 | 2101 | 2102 | 2103 | 2104 | 2105 | 2106 | 2107 | 2108 | 2109 | 2110 | 2111 | 2112 | 2113 | 2114 | 2115 | 2116 | 2117 | 2118 | 2119 | 2120 | 2121 | 2122 | 2123 | 2124 | 2125 | 2126 | 2127 | 2128 | 2129 | 2130 | 2131 | 2132 | 2133 | 2134 | 2135 | 2136 | 2137 | 2138 | 2139 | 2140 | 2141 | 2142 | 2143 | 2144 | 2145 | 2146 | 2147 | 2148 | 2149 | 2150 | 2151 | 2152 | 2153 | 2154 | 2155 | 2156 | 2157 | 2158 | 2159 | 2160 | 2161 | 2162 | 2163 | 2164 | 2165 | 2166 | 2167 | 2168 | 2169 | 2170 | 2171 | 2172 | 2173 | 2174 | 2175 | 2176 | 2177 | 2178 | 2179 | 2180 | 2181 | 2182 | 2183 | 2184 | 2185 | 2186 | 2187 | 2188 | 2189 | 2190 | 2191 | 2192 | 2193 | 2194 | 2195 | 2196 | 2197 | 2198 | 2199 | 2200 | 2201 | 2202 | 2203 | 2204 | 2205 | 2206 | 2207 | 2208 | 2209 | 2210 | 2211 | 2212 | 2213 | 2214 | 2215 | 2216 | 2217 | 2218 | 2219 | 2220 | 2221 | 2222 | 2223 | 2224 | 2225 | 2226 | 2227 | 2228 | 2229 | 2230 | 2231 | 2232 | 2233 | 2234 | 2235 | 2236 | 2237 | 2238 | 2239 | 2240 | 2241 | 2242 | 2243 | 2244 | 2245 | 2246 | 2247 | 2248 | 2249 | 2250 | 2251 | 2252 | 2253 | 2254 | 2255 | 2256 | 2257 | 2258 | 2259 | 2260 | 2261 | 2262 | 2263 | 2264 | 2265 | 2266 | 2267 | 2268 | 2269 | 2270 | 2271 | 2272 | 2273 | 2274 | 2275 | 2276 | 2277 | 2278 | 2279 | 2280 | 2281 | 2282 | 2283 | 2284 | 2285 | 2286 | 2287 | 2288 | 2289 | 2290 | 2291 | 2292 | 2293 | 2294 | 2295 | 2296 | 2297 | 2298 | 2299 | 2300 | 2301 | 2302 | 2303 | 2304 | 2305 | 2306 | 2307 | 2308 | 2309 | 2310 | 2311 | 2312 | 2313 | 2314 | 2315 | 2316 | 2317 | 2318 | 2319 | 2320 | 2321 | 2322 | 2323 | 2324 | 2325 | 2326 | 2327 | 2328 | 2329 | 2330 | 2331 | 2332 | 2333 | 2334 | 2335 | 2336 | 2337 | 2338 | 2339 | 2340 | 2341 | 2342 | 2343 | 2344 | 2345 | 2346 | 2347 | 2348 | 2349 | 2350 | 2351 | 2352 | 2353 | 2354 | 2355 | 2356 | 2357 | 2358 | 2359 | 2360 | 2361 | 2362 | 2363 | 2364 | 2365 | 2366 | 2367 | 2368 | 2369 | 2370 | 2371 | 2372 | 2373 | 2374 | 2375 | 2376 | 2377 | 2378 | 2379 | 2380 | 2381 | 2382 | 2383 | 2384 | 2385 | 2386 | 2387 | 2388 | 2389 | 2390 | 2391 | 2392 | 2393 | 2394 | 2395 | 2396 | 2397 | 2398 | 2399 | 2400 | 2401 | 2402 | 2403 | 2404 | 2405 | 2406 | 2407 | 2408 | 2409 | 2410 | 2411 | 2412 | 2413 | 2414 | 2415 | 2416 | 2417 | 2418 | 2419 | 2420 | 2421 | 2422 | 2423 | 2424 | 2425 | 2426 | 2427 | 2428 | 2429 | 2430 | 2431 | 2432 | 2 |
|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
|--|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|

A coding apparatus for embedding second data into first data without deteriorating the first data includes a memory for storing at least partial data of the first data. An embedding coder embeds the second data into the first data by rearranging, according to the second data, at least partial data of the first data stored in the memory. A decoding apparatus for decoding coded data into the original first data and the original second data without deteriorating the quality of the data includes a relation calculating unit for calculating a relation between first partial data and second partial data of the coded data. A decoder decodes the coded data into the original first data by moving the first partial data and the second partial data of the coded data based on the relation calculated by the relation calculating unit, and decodes the second data that is embedded in the coded data according to the movement.

FIG. 1

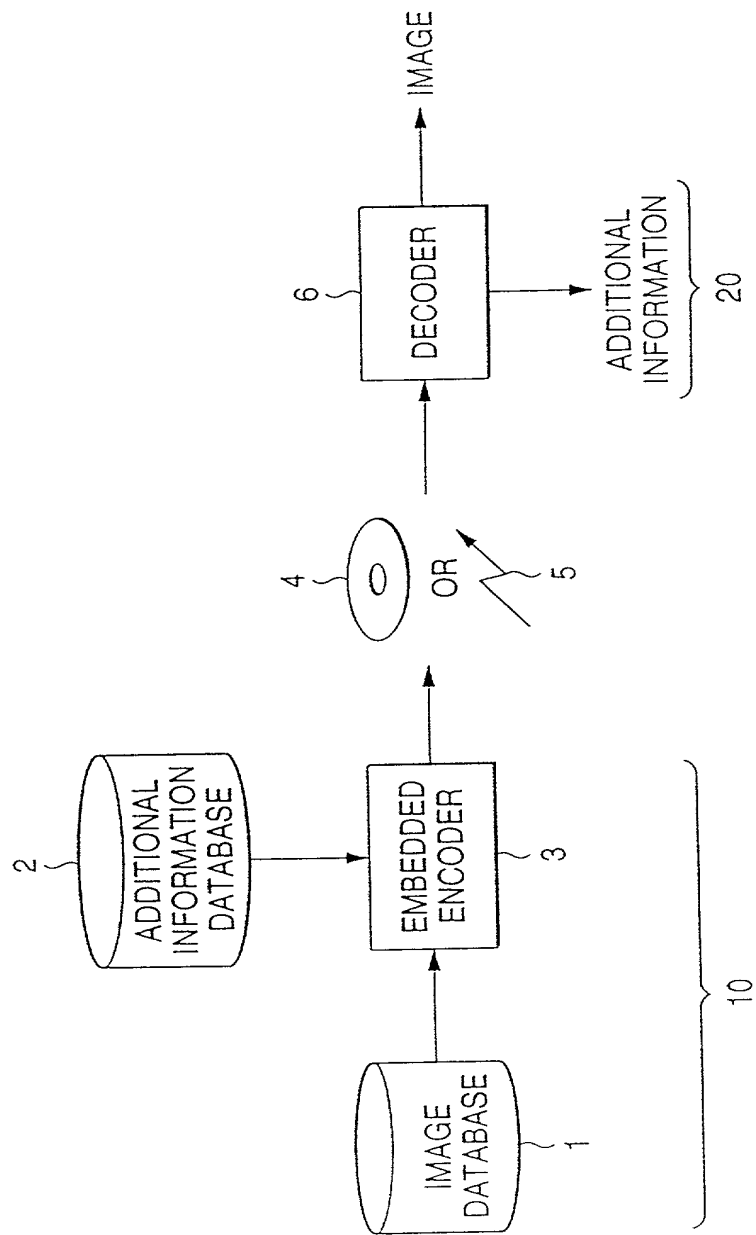


IMAGE TRANSMISSION SYSTEM

FIG. 2

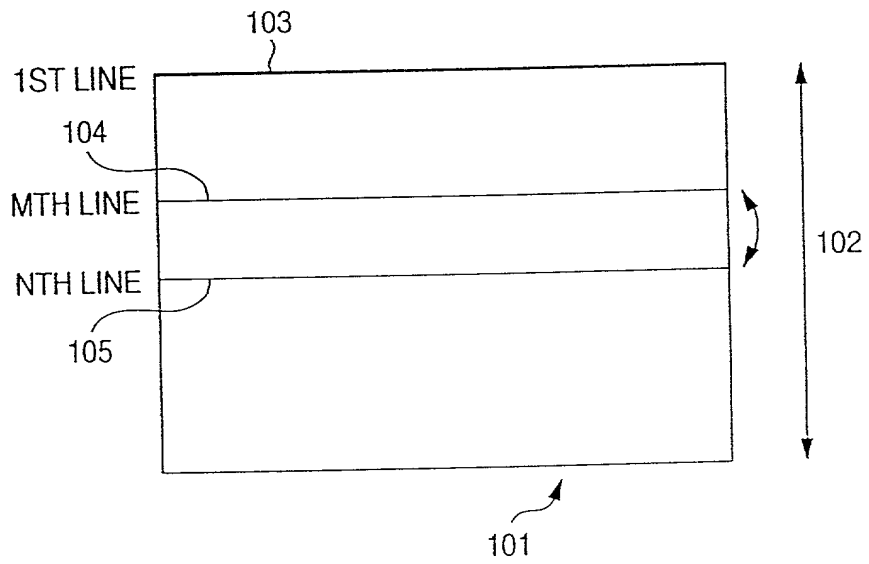


FIG. 3A


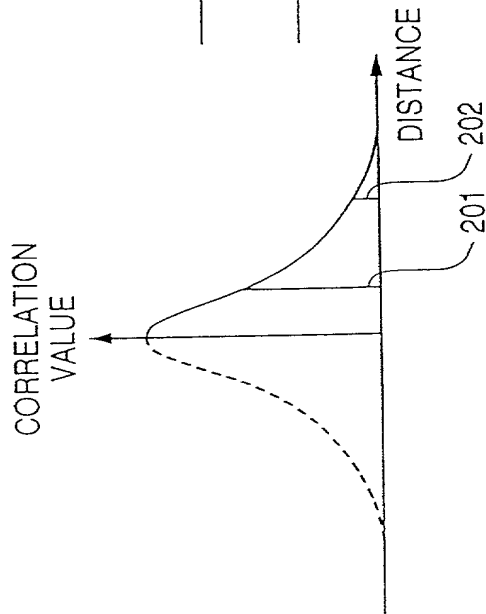


FIG. 3B

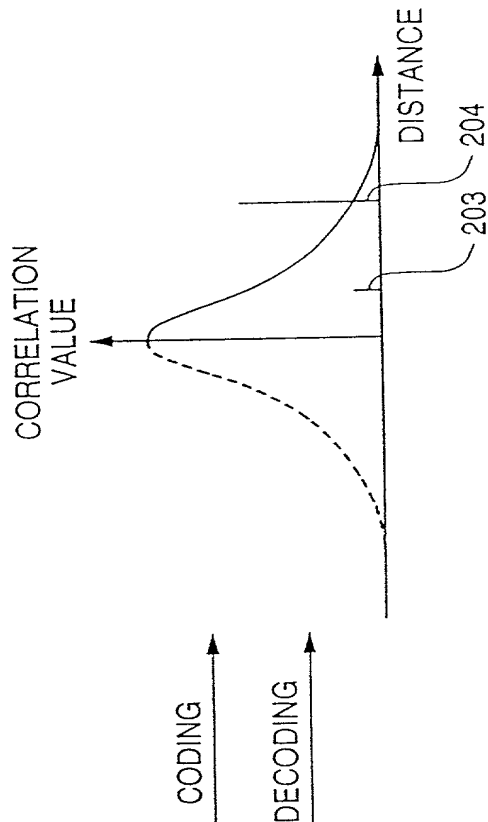

CODING

DECODING

EMBEDDED CODING/DECODING

FIG. 64

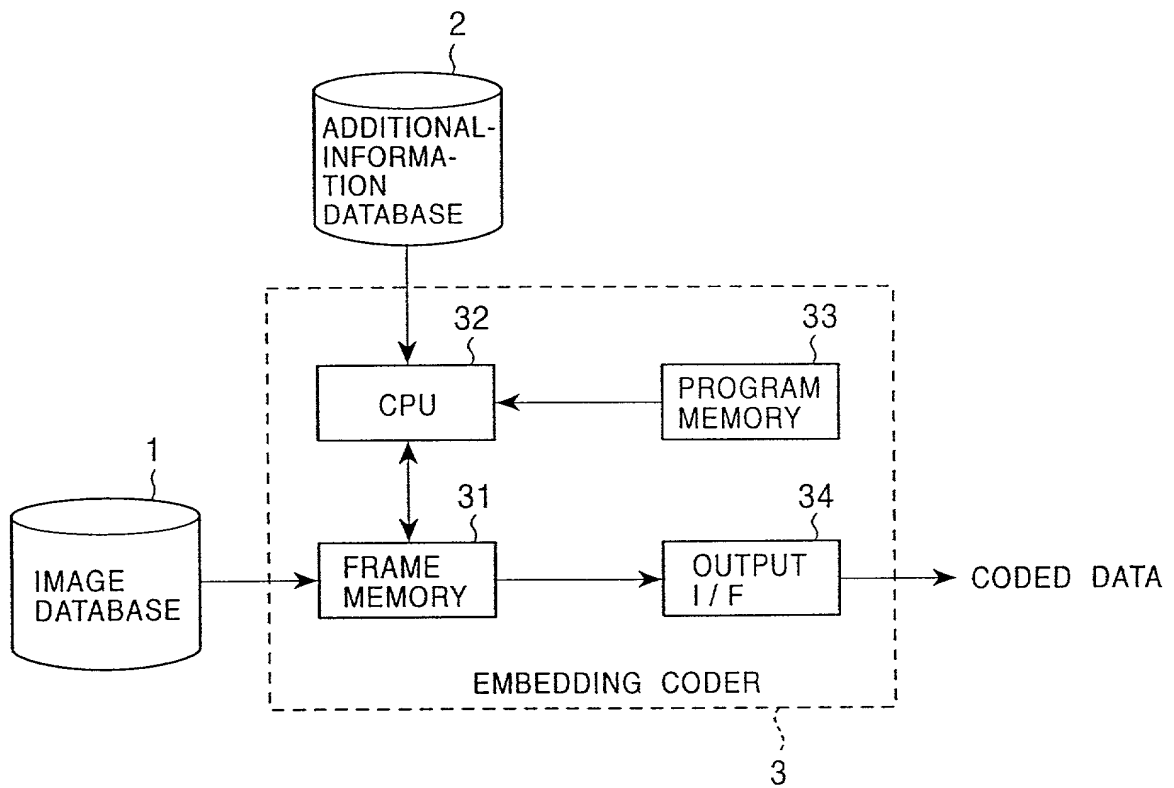


FIG. 75

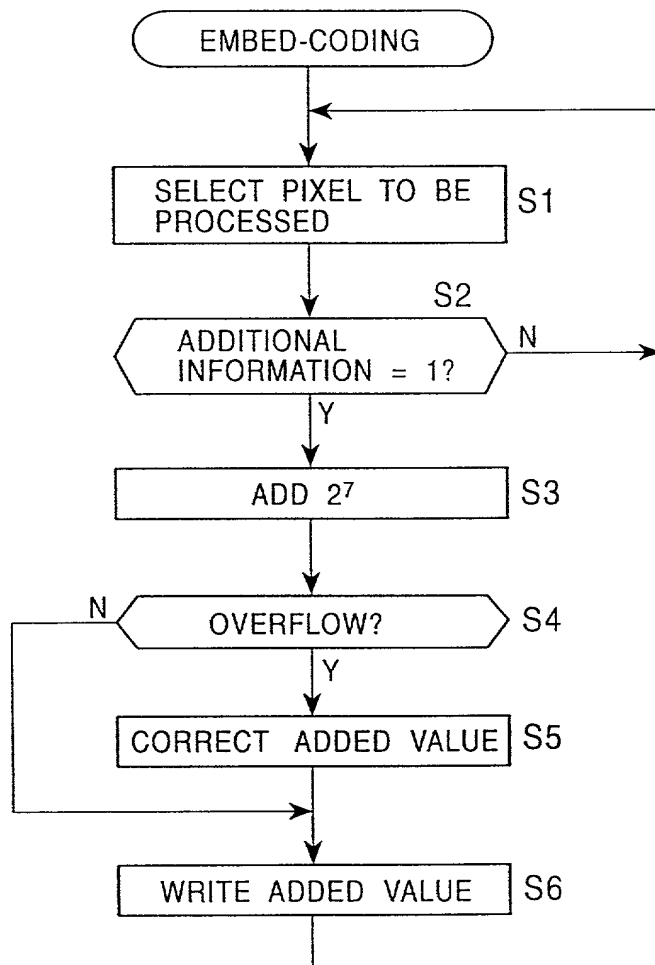


FIG. 8 6

PIXEL

| | | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| p(1,1) | p(2,1) | p(3,1) | p(4,1) | p(5,1) | p(6,1) | p(7,1) | p(8,1) | p(9,1) |
| p(1,2) | p(2,2) | p(3,2) | p(4,2) | p(5,2) | p(6,2) | p(7,2) | p(8,2) | p(9,2) |
| p(1,3) | p(2,3) | p(3,3) | p(4,3) | p(5,3) | p(6,3) | p(7,3) | p(8,3) | p(9,3) |
| p(1,4) | p(2,4) | p(3,4) | p(4,4) | p(5,4) | p(6,4) | p(7,4) | p(8,4) | p(9,4) |
| p(1,5) | p(2,5) | p(3,5) | p(4,5) | p(5,5) | p(6,5) | p(7,5) | p(8,5) | p(9,5) |
| p(1,6) | p(2,6) | p(3,6) | p(4,6) | p(5,6) | p(6,6) | p(7,6) | p(8,6) | p(9,6) |
| p(1,7) | p(2,7) | p(3,7) | p(4,7) | p(5,7) | p(6,7) | p(7,7) | p(8,7) | p(9,7) |
| p(1,8) | p(2,8) | p(3,8) | p(4,8) | p(5,8) | p(6,8) | p(7,8) | p(8,8) | p(9,8) |
| p(1,9) | p(2,9) | p(3,9) | p(4,9) | p(5,9) | p(6,9) | p(7,9) | p(8,9) | p(9,9) |
| p(1,10) | p(2,10) | p(3,10) | p(4,10) | p(5,10) | p(6,10) | p(7,10) | p(8,10) | p(9,10) |

FIG. 97

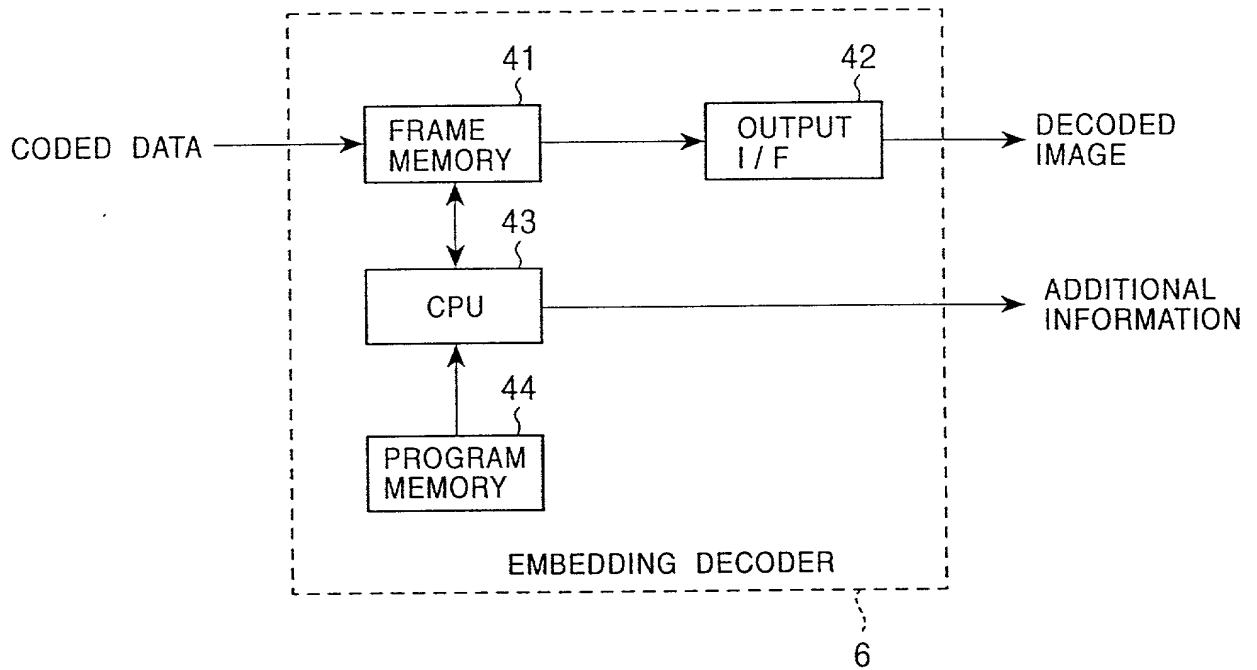
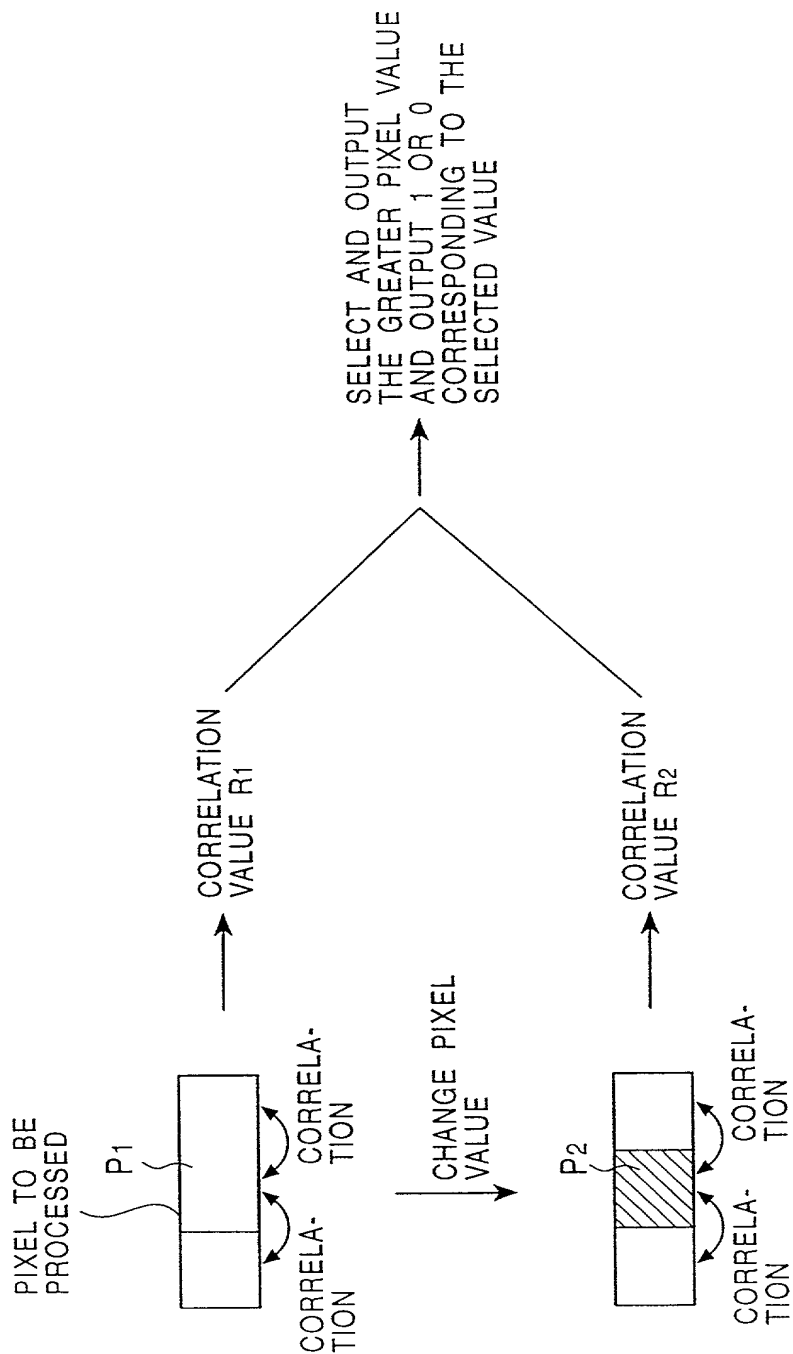


FIG. 108






FIG. 12/0

PIXEL

| | | | | | | | | |
|---------|---------|---------|---------|---------|---------|---------|---------|---------|
| p(1,1) | p(2,1) | p(3,1) | p(4,1) | p(5,1) | p(6,1) | p(7,1) | p(8,1) | p(9,1) |
| p(1,2) | p(2,2) | p(3,2) | p(4,2) | p(5,2) | p(6,2) | p(7,2) | p(8,2) | p(9,2) |
| p(1,3) | p(2,3) | p(3,3) | p(4,3) | p(5,3) | p(6,3) | p(7,3) | p(8,3) | p(9,3) |
| p(1,4) | p(2,4) | p(3,4) | p(4,4) | p(5,4) | p(6,4) | p(7,4) | p(8,4) | p(9,4) |
| p(1,5) | p(2,5) | p(3,5) | p(4,5) | p(5,5) | p(6,5) | p(7,5) | p(8,5) | p(9,5) |
| p(1,6) | p(2,6) | p(3,6) | p(4,6) | p(5,6) | p(6,6) | p(7,6) | p(8,6) | p(9,6) |
| p(1,7) | p(2,7) | p(3,7) | p(4,7) | p(5,7) | p(6,7) | p(7,7) | p(8,7) | p(9,7) |
| p(1,8) | p(2,8) | p(3,8) | p(4,8) | p(5,8) | p(6,8) | p(7,8) | p(8,8) | p(9,8) |
| p(1,9) | p(2,9) | p(3,9) | p(4,9) | p(5,9) | p(6,9) | p(7,9) | p(8,9) | p(9,9) |
| p(1,10) | p(2,10) | p(3,10) | p(4,10) | p(5,10) | p(6,10) | p(7,10) | p(8,10) | p(9,10) |

000760" 86792960

FIG. 4A


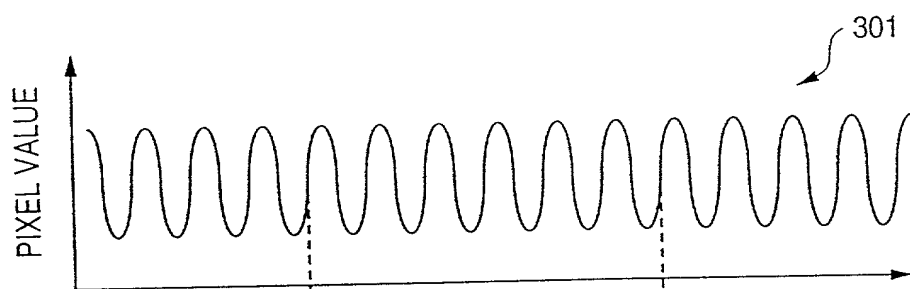


FIG. 4B

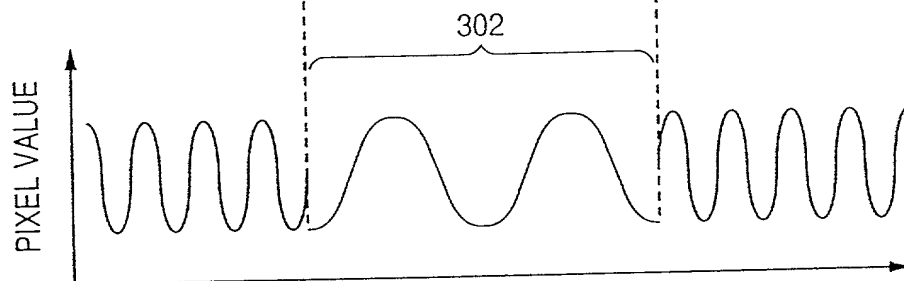

UTILIZATION OF CONTINUITY

FIG. 12



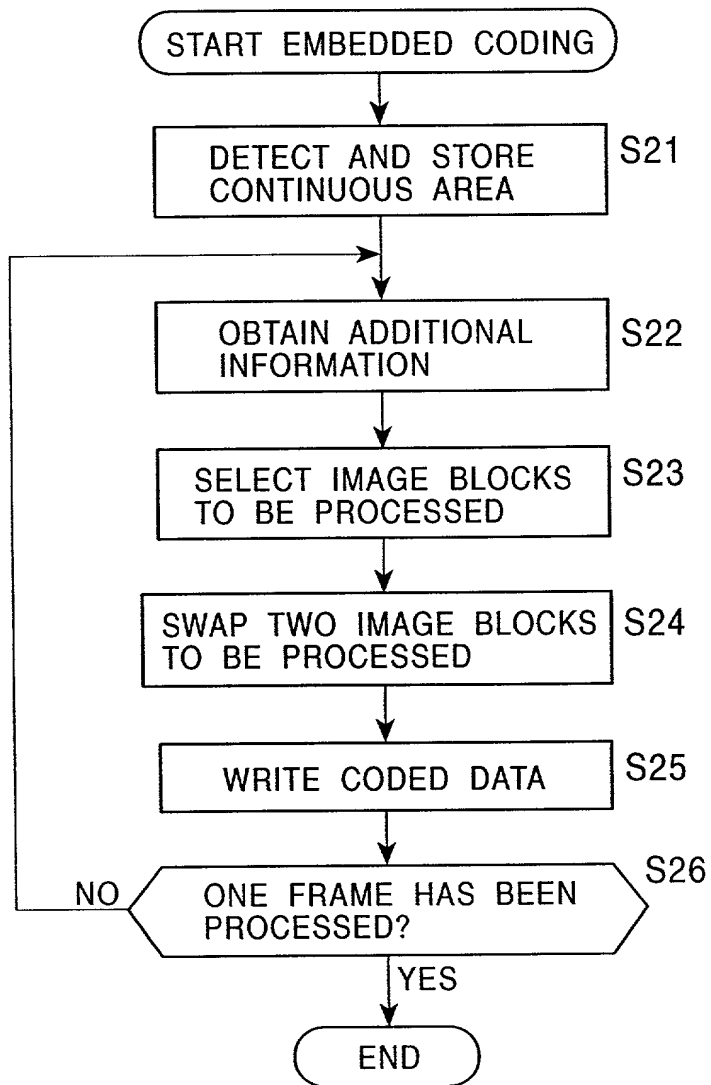


FIG. 14

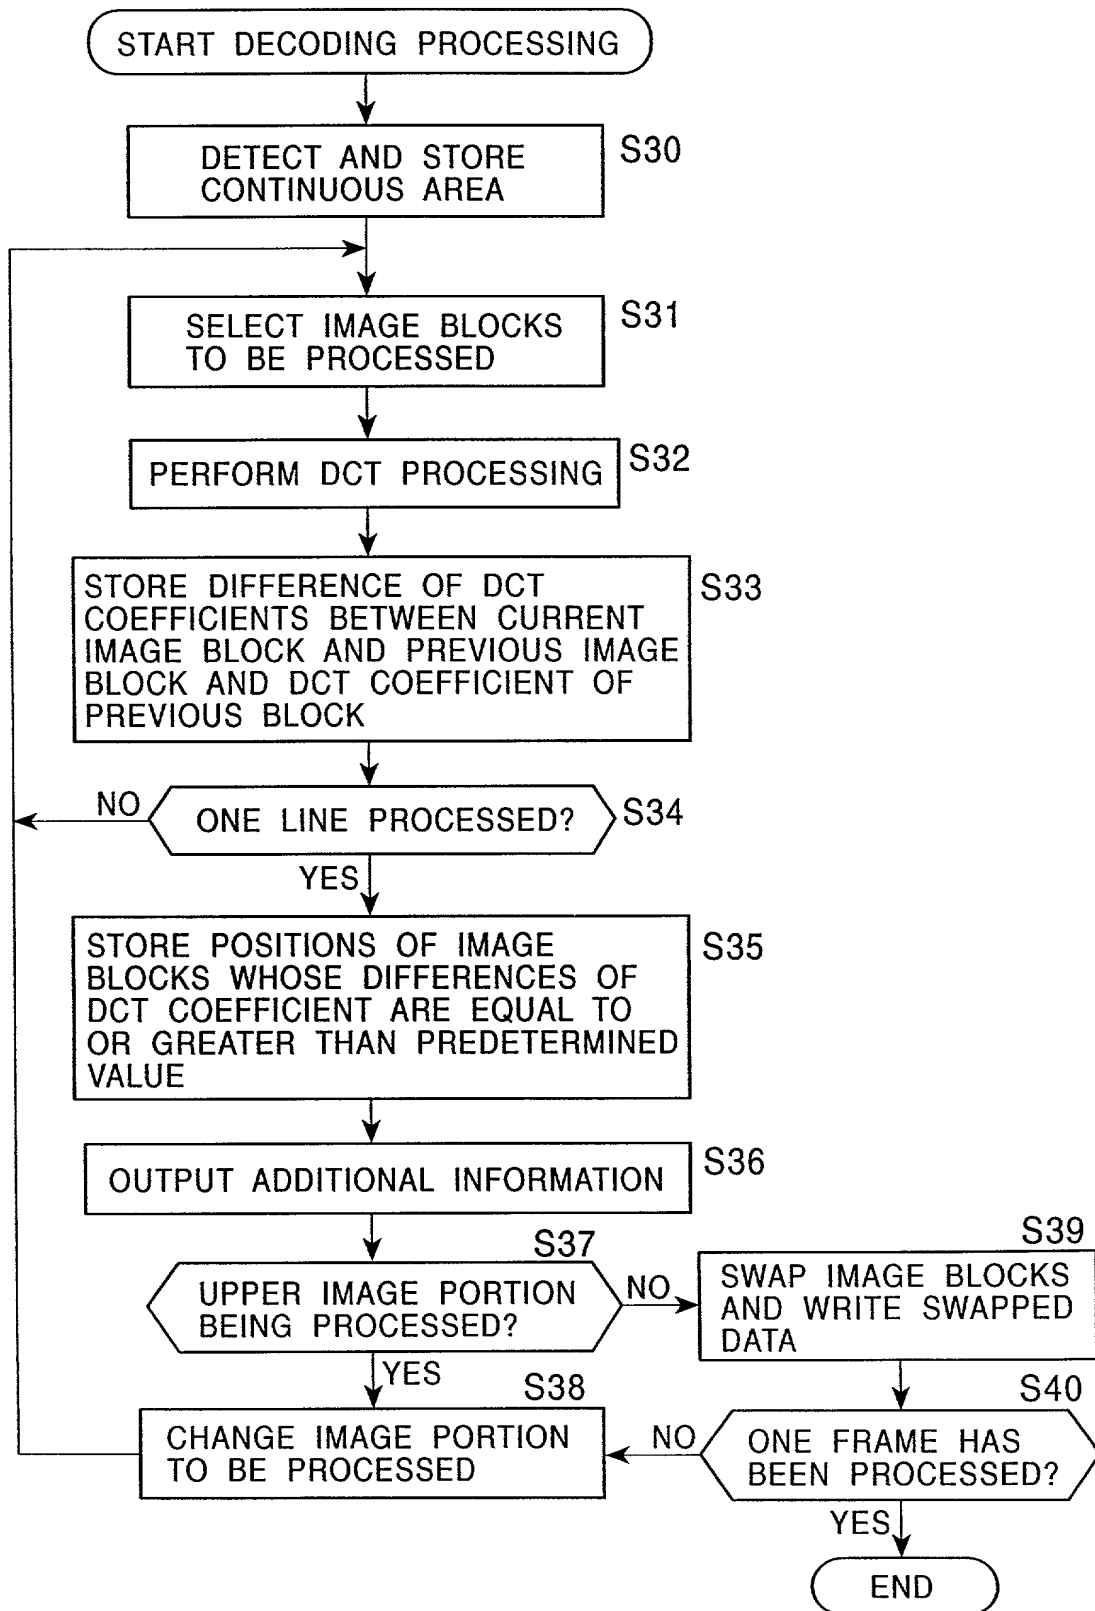


000780 0079560

15
FIG. 5A

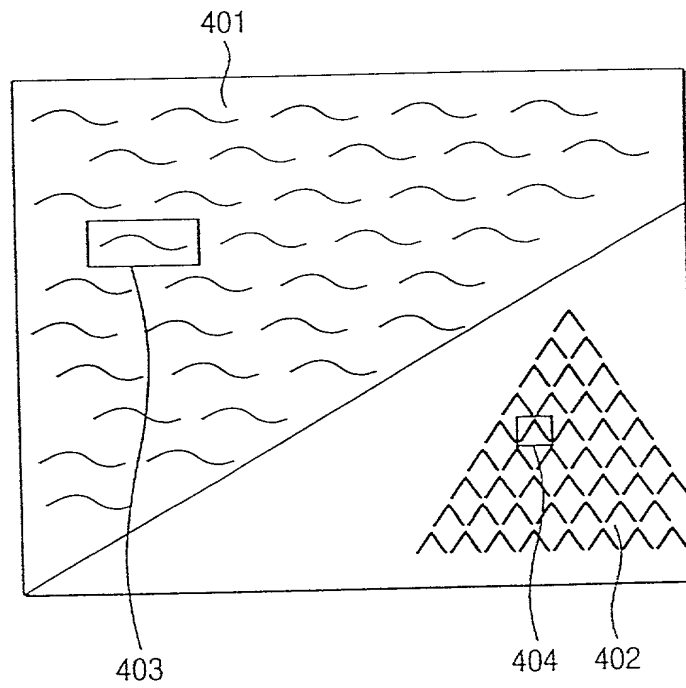

15
FIG. 5B

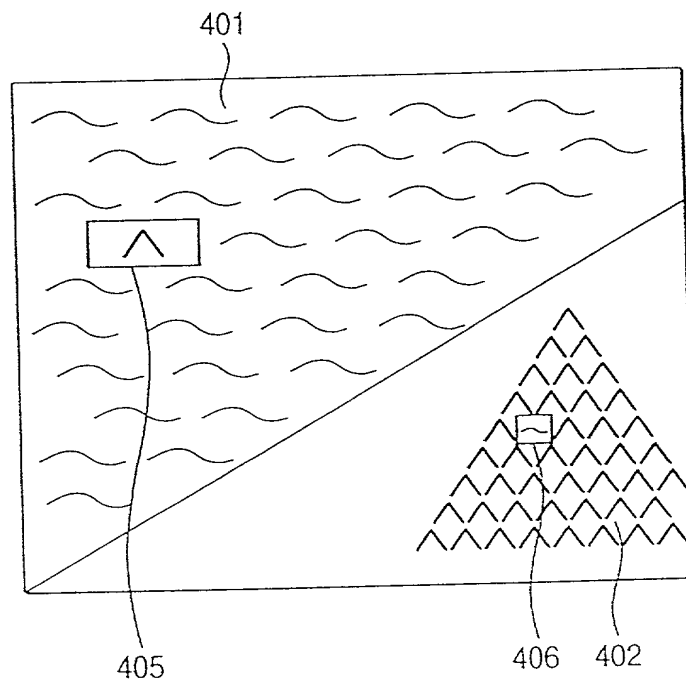

UTILIZATION OF SIMILARITY

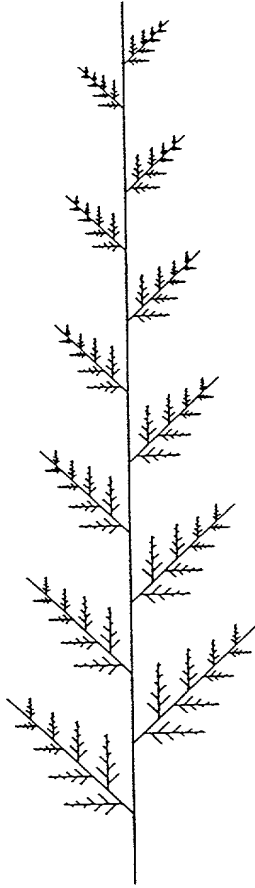


FIG. 6A

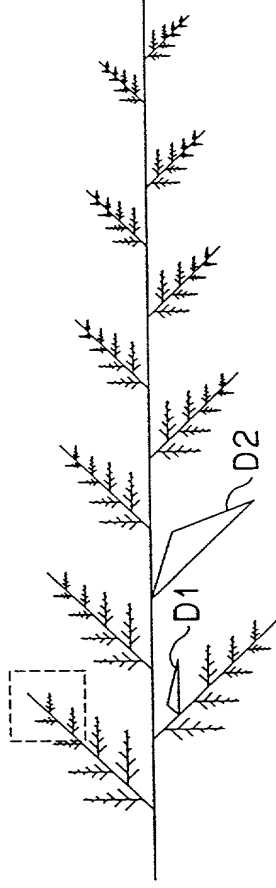


FIG. 6B

FIG. 7


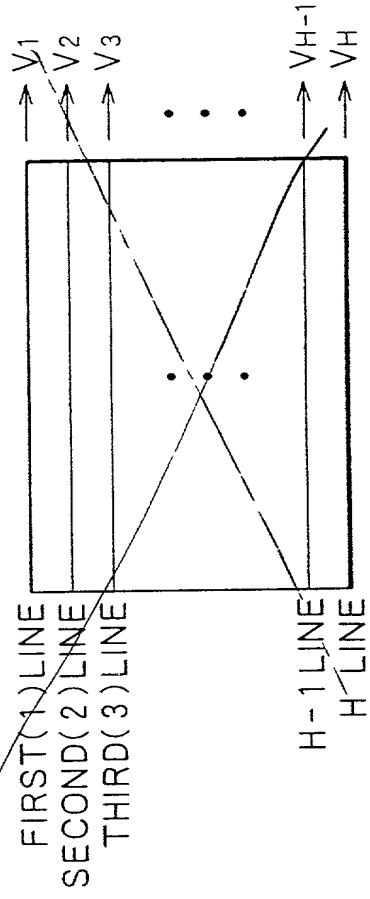


FIG. 18A

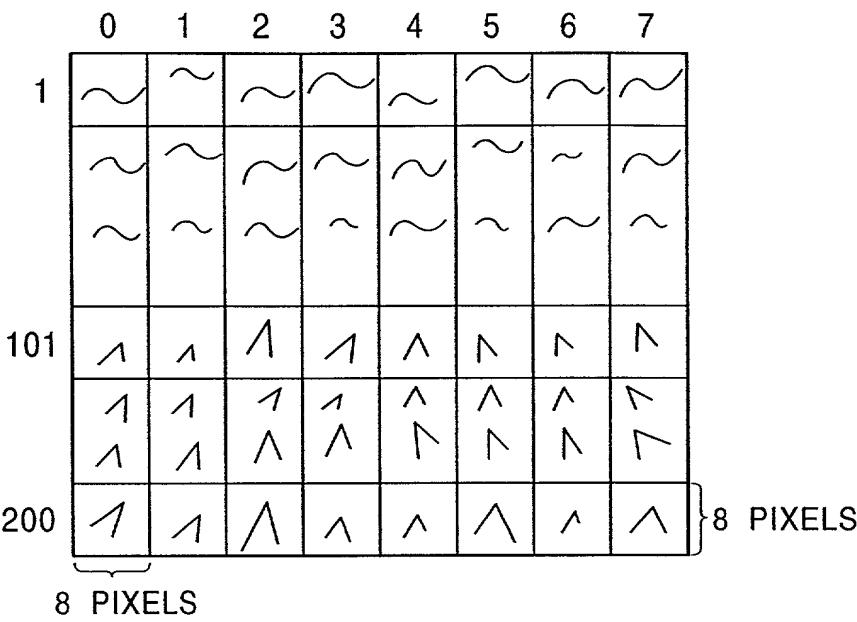

DECODING ↑ ↓ CODING

FIG. 18B

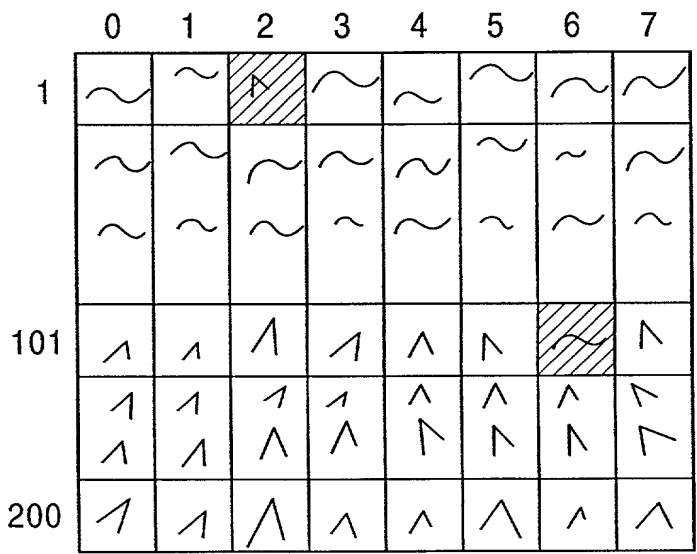


FIG. 20

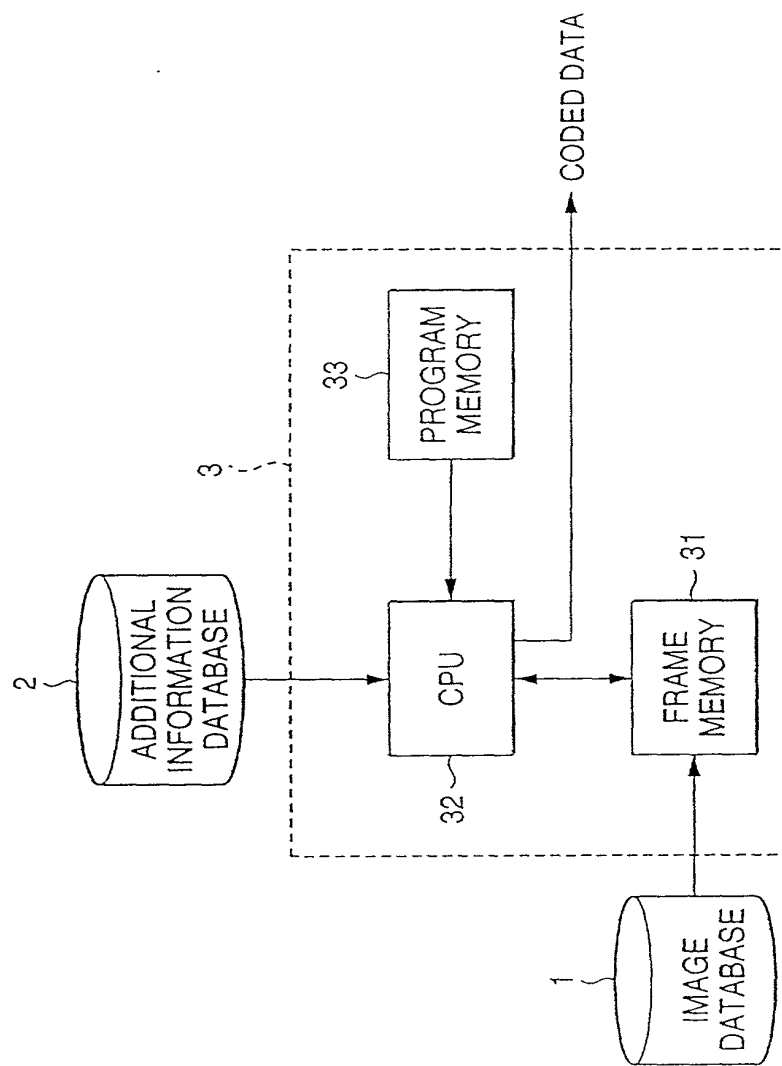


FIG. 721

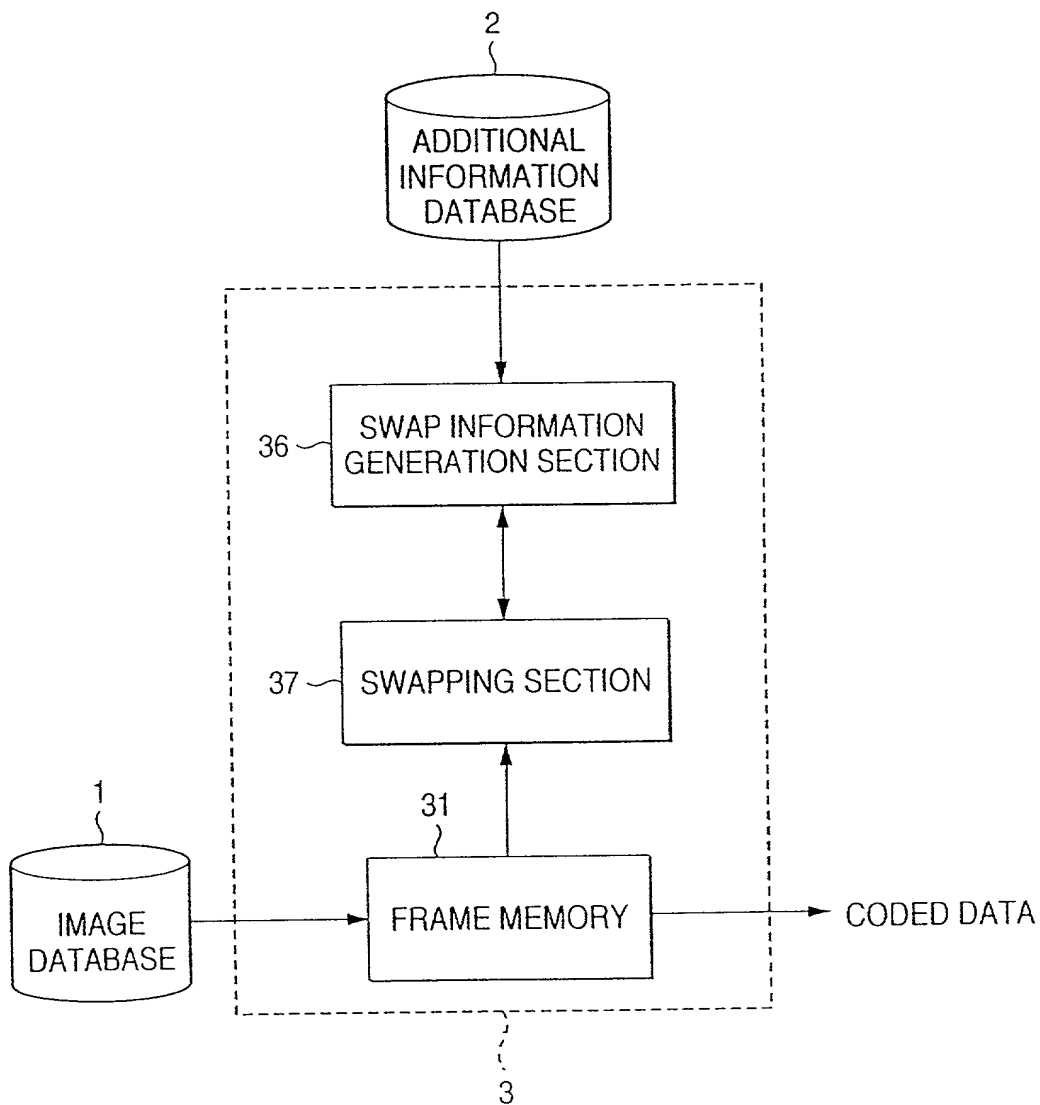


FIG. 9A

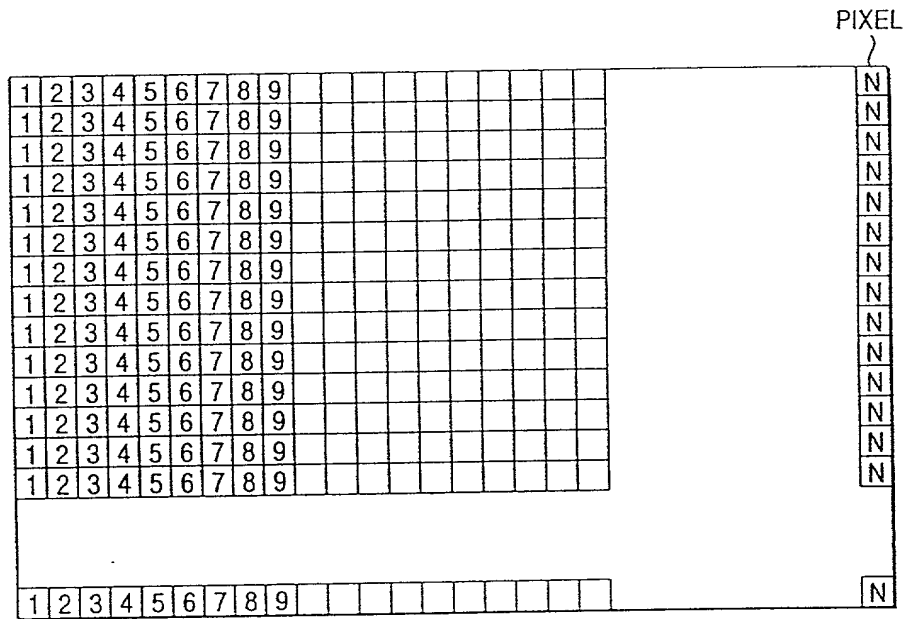


FIG. 23B

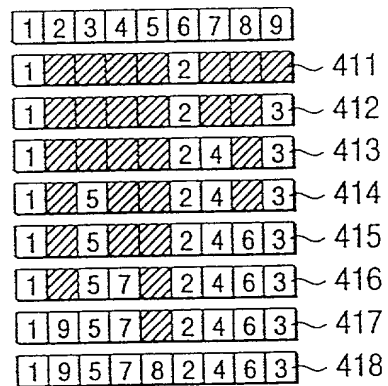


FIG. 23C

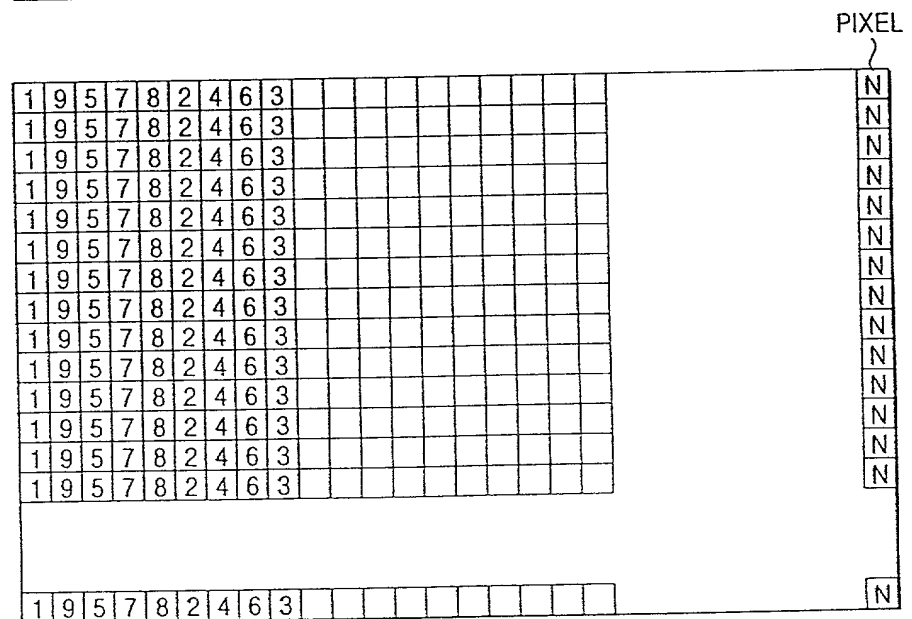


FIG. 10-24

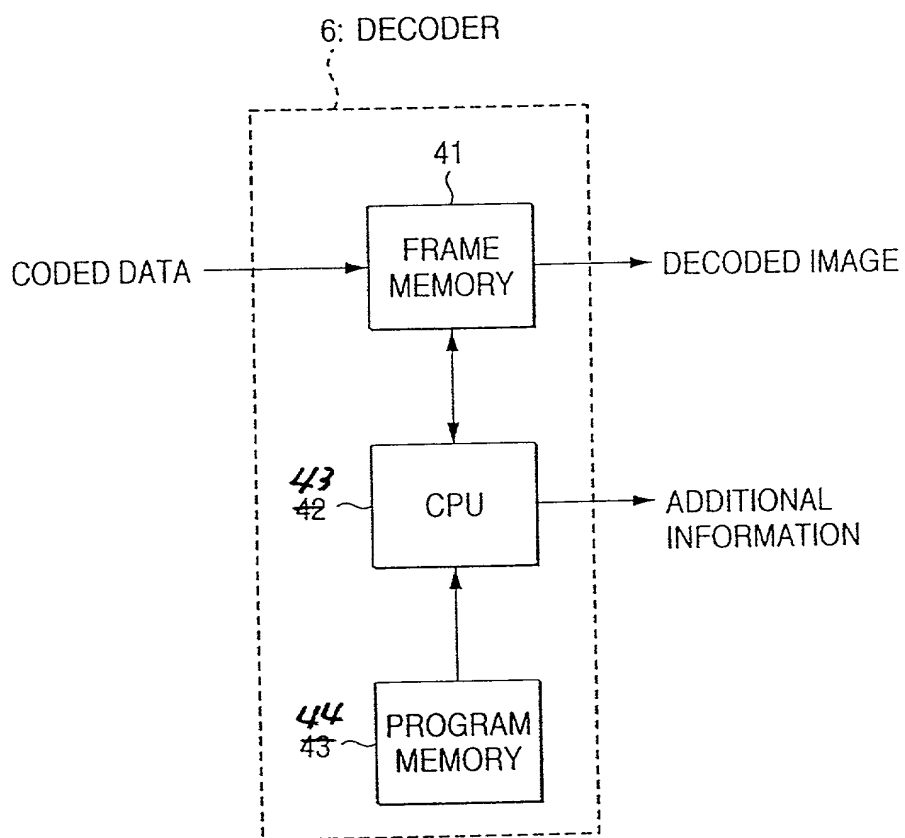


FIG. 11 25



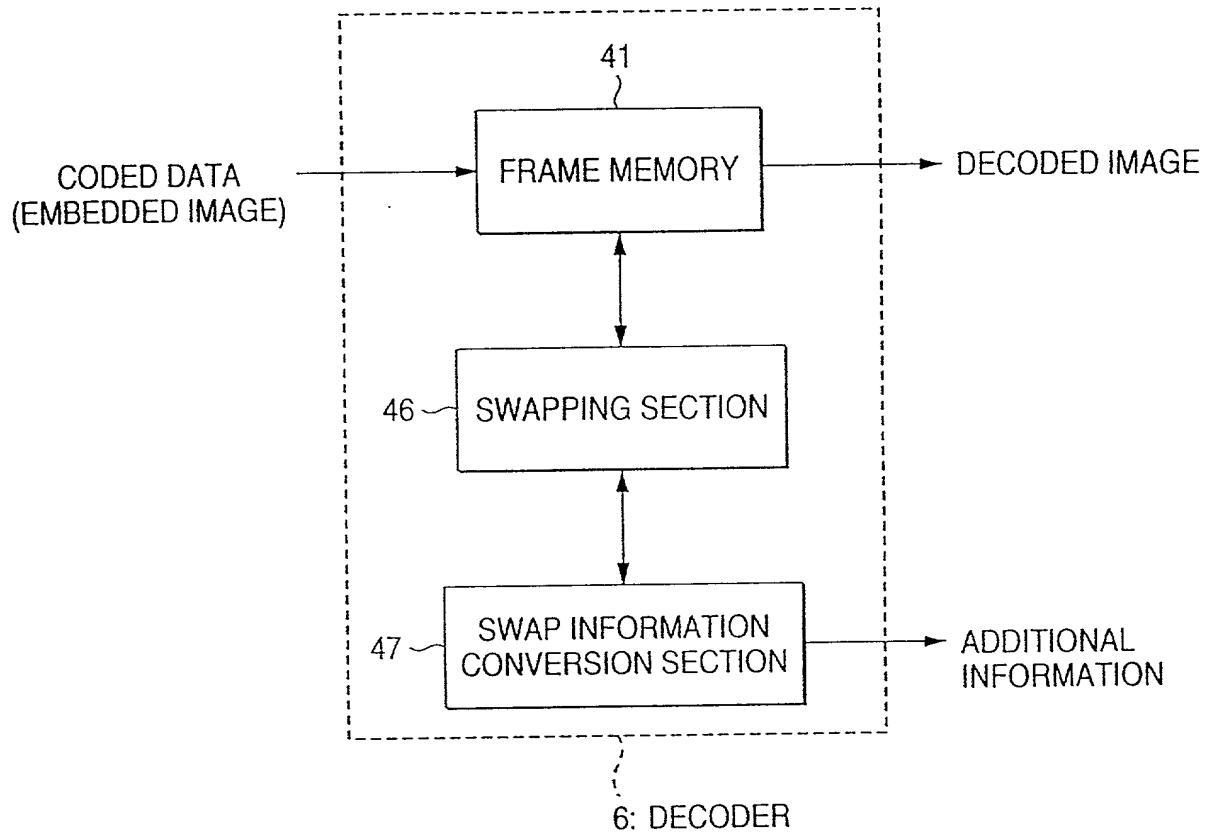


FIG. 13²⁷

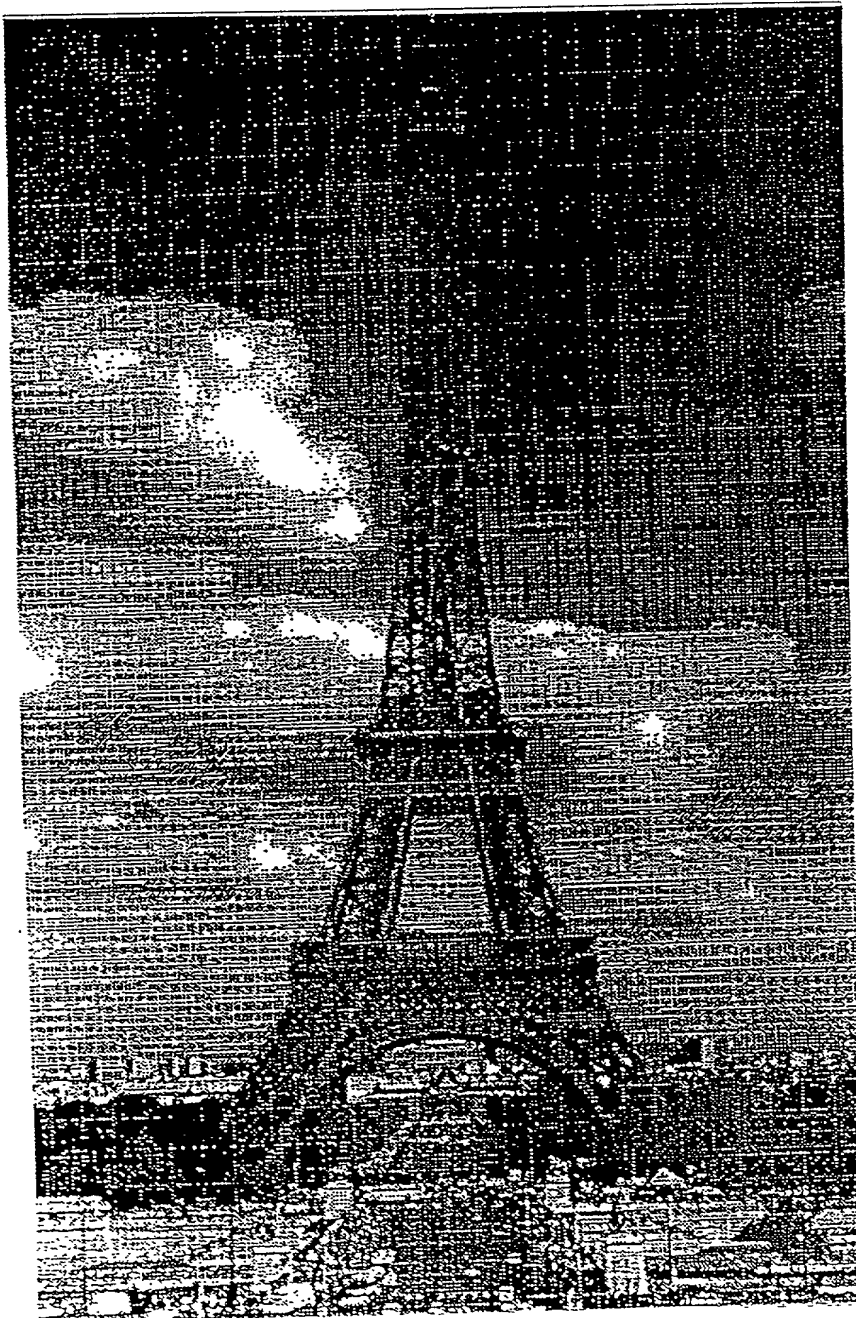


09636138-081000

FIG. 14-28

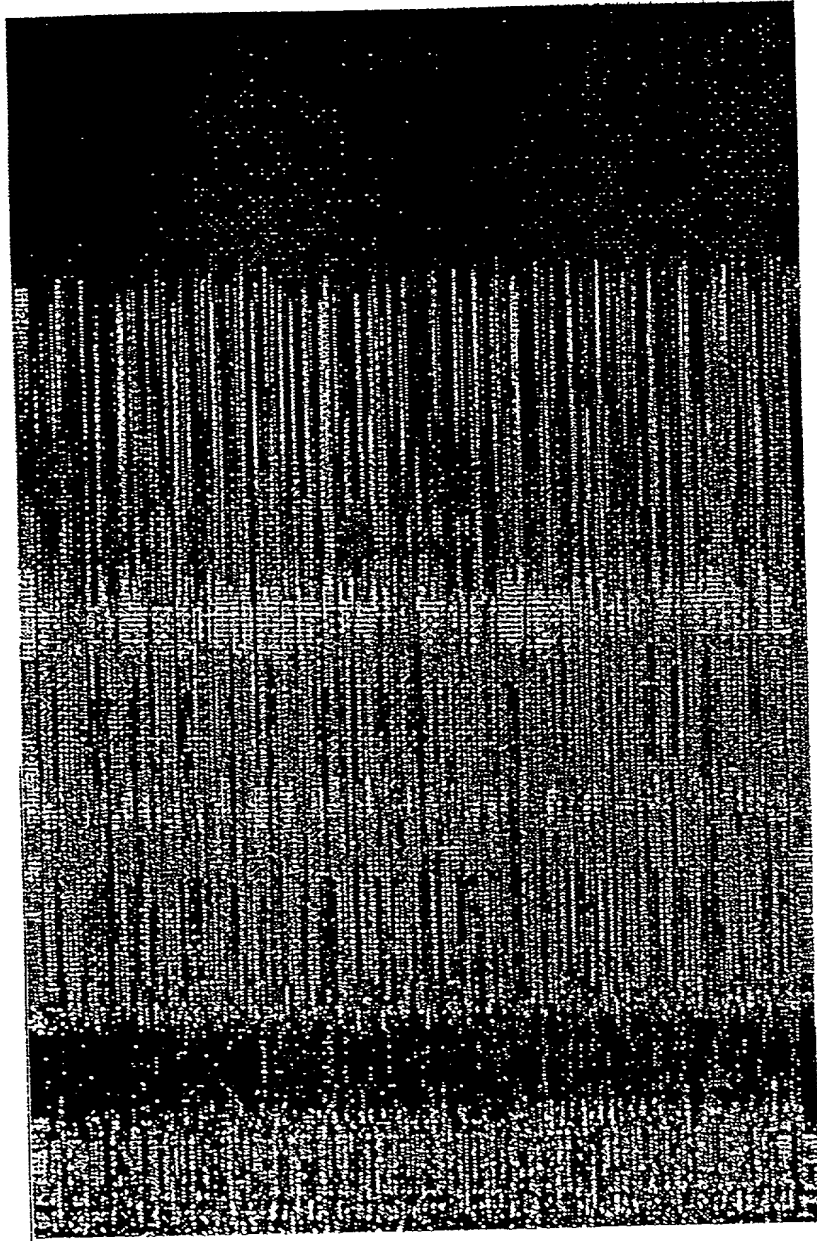


09636438-094000

FIG. 1529

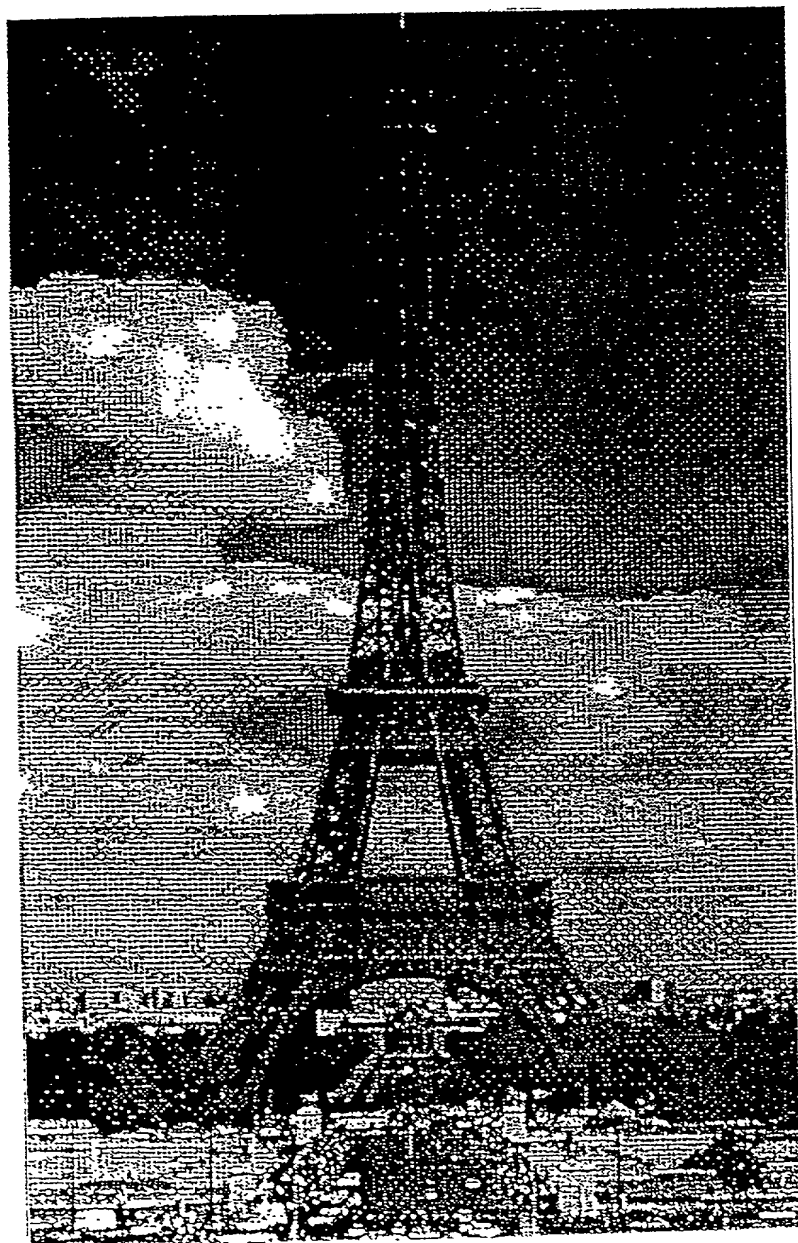

00636438-004000

FIG. 16 30A

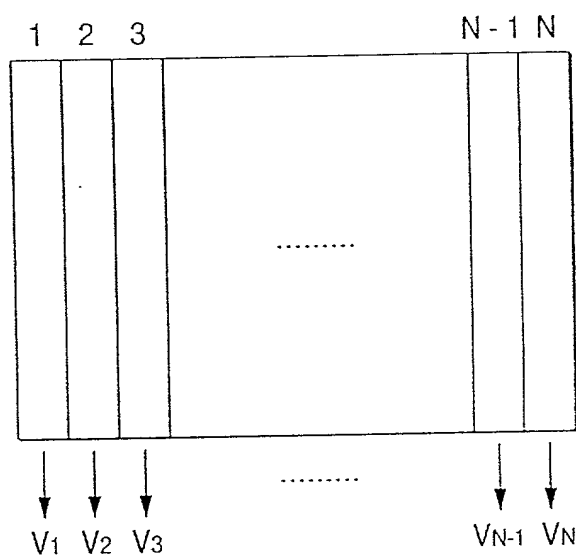

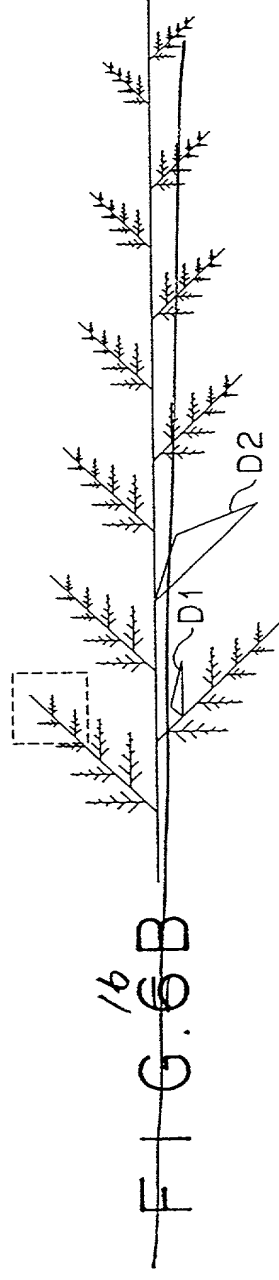
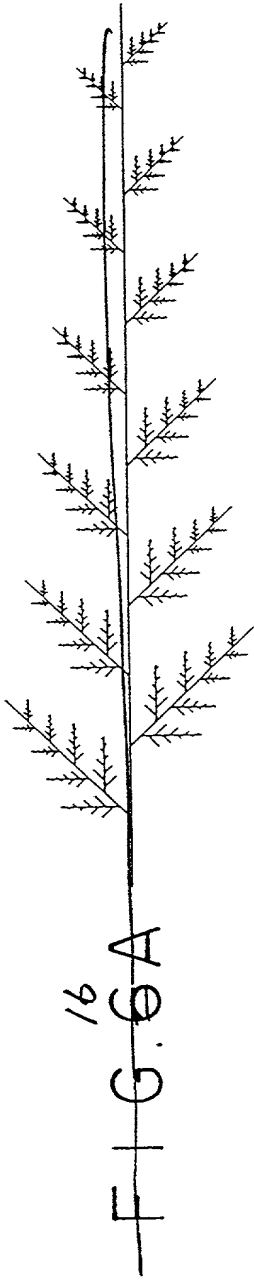


FIG. 730B

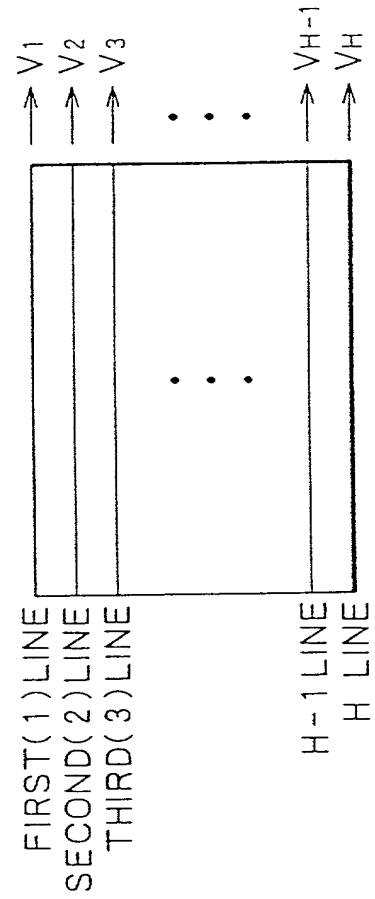


FIG. 8³¹


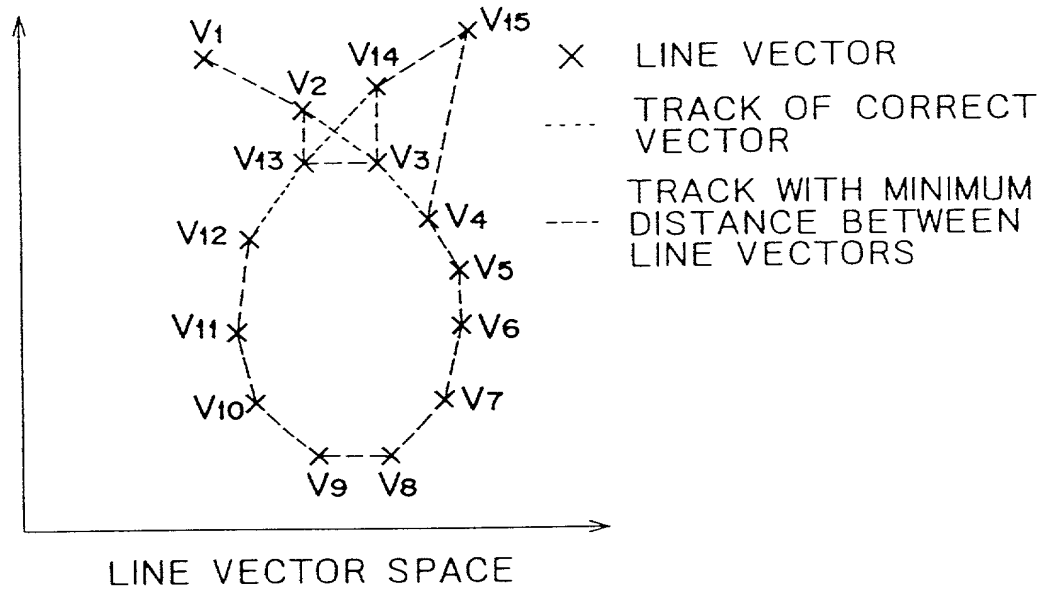


FIG. 9³²

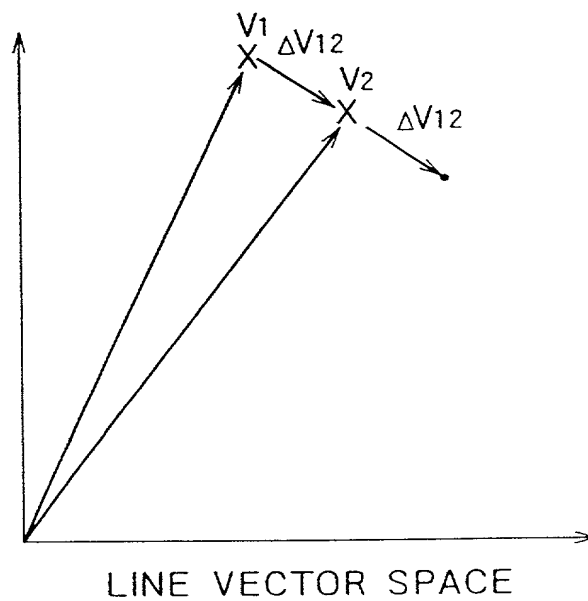

34
FIG. 20A

| | | | | | | | |
|--------|--------|--------|--------|--------|--------|-------|--------|
| (1, 3) | (1, 4) | (1, 6) | (1, 5) | (1, 1) | (1, N) | | (1, 2) |
| (2, 3) | (2, 4) | (2, 6) | (2, 5) | (2, 1) | (2, N) | | (2, 2) |
| (3, 3) | (3, 4) | (3, 6) | (3, 5) | (3, 1) | (3, N) | | (3, 2) |
| (4, 3) | (4, 4) | (4, 6) | (4, 5) | (4, 1) | (4, N) | | (4, 2) |
| (5, 3) | (5, 4) | (5, 6) | (5, 5) | (5, 1) | (5, N) | | (5, 2) |
| | | | | | | | |
| (M, 3) | (M, 4) | (M, 6) | (M, 5) | (M, 4) | (M, N) | | (M, 2) |

34
FIG. 20B

| | | | | | | | |
|--------|--------|--------|--------|--------|--------|-------|--------|
| (5, 3) | (5, 4) | (5, 6) | (5, 5) | (5, 1) | (5, N) | | (5, 2) |
| (3, 3) | (3, 4) | (3, 6) | (3, 5) | (3, 1) | (3, N) | | (3, 2) |
| (1, 3) | (1, 4) | (1, 6) | (1, 5) | (1, 1) | (1, N) | | (1, 2) |
| (M, 3) | (M, 4) | (M, 6) | (M, 5) | (M, 1) | (M, N) | | (M, 2) |
| (2, 3) | (2, 4) | (2, 6) | (2, 5) | (2, 1) | (2, N) | | (2, 2) |
| | | | | | | | |
| (4, 3) | (4, 4) | (4, 6) | (4, 5) | (4, 1) | (4, N) | | (4, 2) |

FIG. 21³⁵



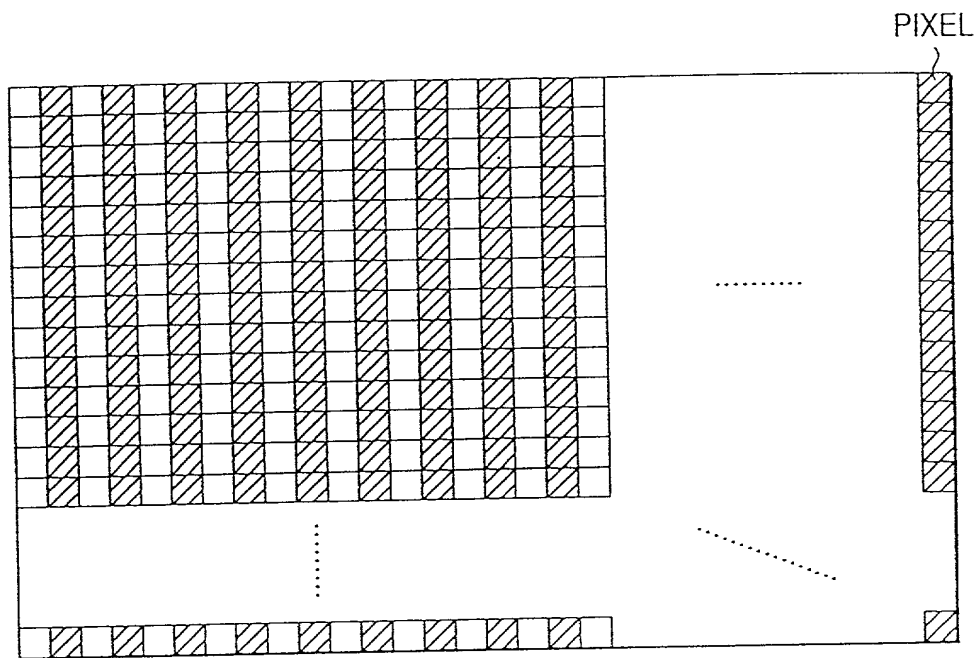



FIG. 22³⁶

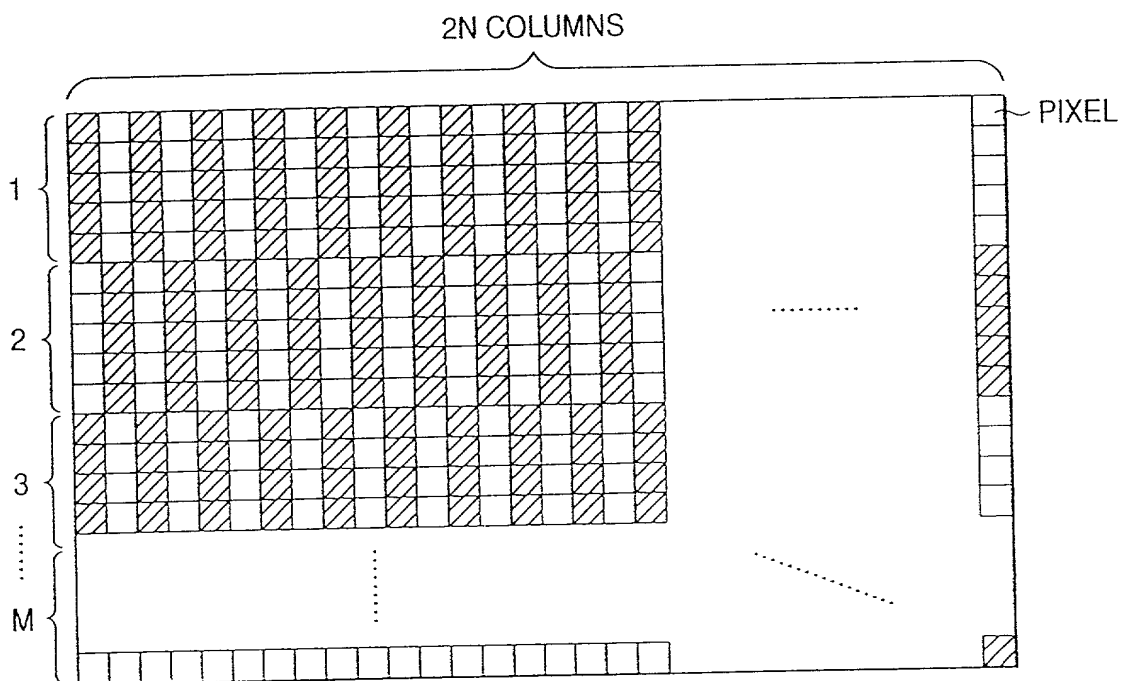


37
FIG. 23

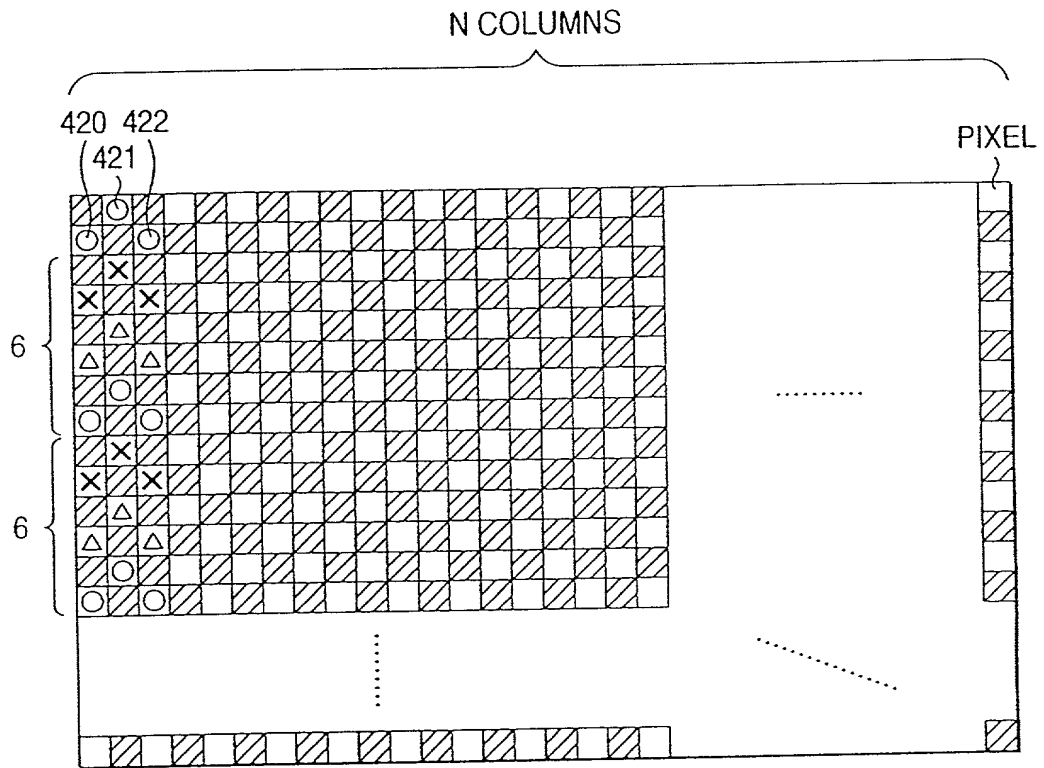


38
FIG. 24A




38
FIG. 24B




611




612




613



614



615



616

38
FIG. 24C


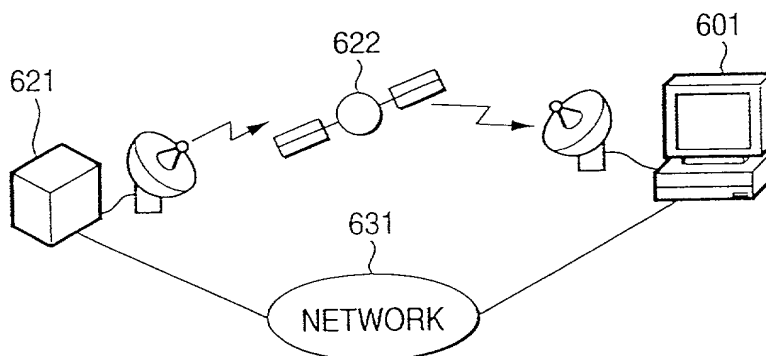


FIG. 25 39

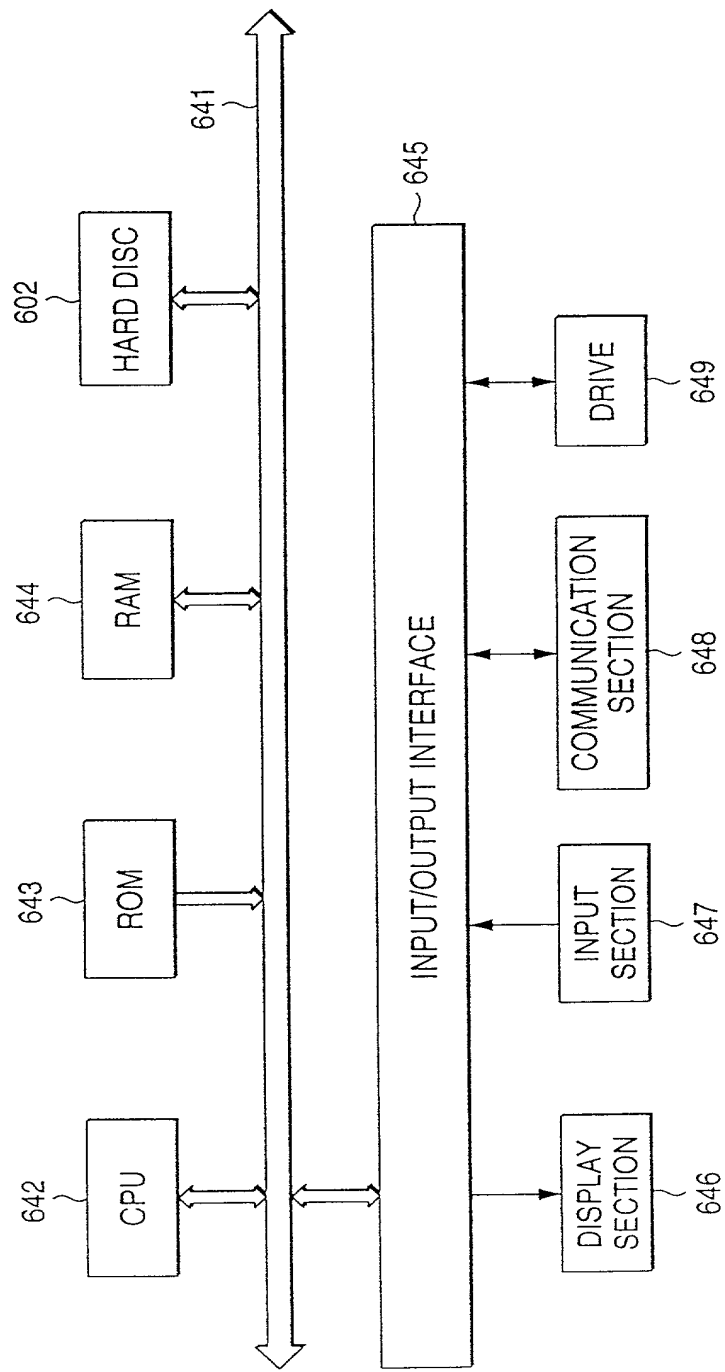

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)

(Under 37 CFR § 1.63; with Power of Attorney)

FROMMER LAWRENCE & HAUG LLP

FLH File No. 450100-4983.1

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

CODING APPARATUS AND METHOD, DECODING APPARATUS AND METHOD, DATA PROCESSING SYSTEM, STORAGE MEDIUM, AND SIGNAL

the specification of which

 X is attached hereto.

 was filed on as Application Serial No. ,

with amendment(s) through (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

| Prior Foreign Application(s) | [List additional applications on separate page]: | Priority Claimed: | | |
|------------------------------|--|-------------------------|-----|----|
| Number: | Country: | Filed (Day/Month/Year): | Yes | No |
| 10-200093 | Japan | 15 July 1998 | X | |
| 10-285308 | Japan | 7 October 1998 | X | |
| 10-222951 | Japan | 6 August 1998 | X | |
| 11-284200 | Japan | 5 October 1999 | X | |

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [List additional applications on separate page]:

| Appln. Ser. Number: | Filed (Day/Month/Year): | Status (patented, pending, abandoned): |
|---------------------|-------------------------|--|
| 09/352,241 | July 13, 1999 | Pending |
| 09/366,872 | August 4, 1999 | Pending |
| 09/413,134 | October 6, 1999 | Pending |

I hereby appoint WILLIAM S. FROMMER, Registration No. 25,506, and DENNIS M. SMID, Registration No. 34,930 or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

WILLIAM S. FROMMER, Esq.
c/o FROMMER LAWRENCE & HAUG LLP
745 Fifth Avenue
New York, New York 10151

Direct all telephone calls to:
(212) 588-0800
to the attention of:
WILLIAM S. FROMMER

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature: _____ Date: _____

Full name of sole or first inventor: Tetsujiro KONDO

Residence: Tokyo, Japan

Citizenship: Japan

Signature: _____ Date: _____

Full name of 2nd joint inventor (if any): Yoshinori WATANABE

Residence: Kanagawa, Japan

Citizenship: Japan

Signature: _____ Date: _____

Full name of 3rd joint inventor (if any): Kenji TANAKA

Residence: Chiba, Japan

Citizenship: Japan

[Similarly list additional inventors on separate page]

Post Office Address(es) of inventor(s):


[if all inventors have the same post office address]

Sony Corporation
7-35 Kitashinagawa 6-chome
Shinagawa-Ku, Tokyo 141, Japan

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

Note: A post office address must be provided for each inventor.

United States Patent & Trademark Office
Office of Initial Patent Examination -- Scanning Division

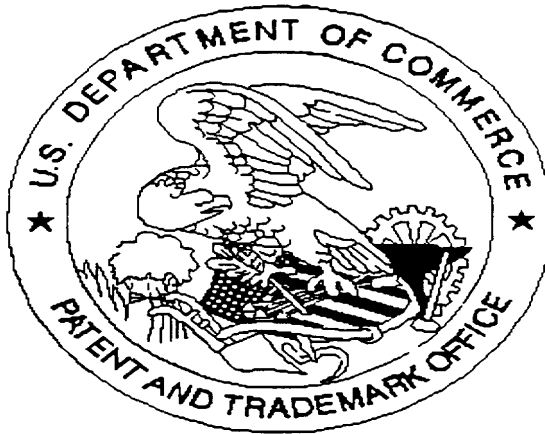

Application deficiencies were found during scanning:

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

☐ Page(s) _____ of _____ were not present
for scanning. (Document title)

then in drawing of 27, 28, 29, of Drawings
☒ Scanned copy is best available.